

# GALAXY F

**COLOR YOUR SPACE**





## GALAXY F COLLECTION

Innovflor

Galaxy F collection is designed with the galaxy in mind, like a light in the darkness of countless planets, each color has its own unique characteristics, 12 colors constitute the galaxy in a thousand different ways

*Color your space*

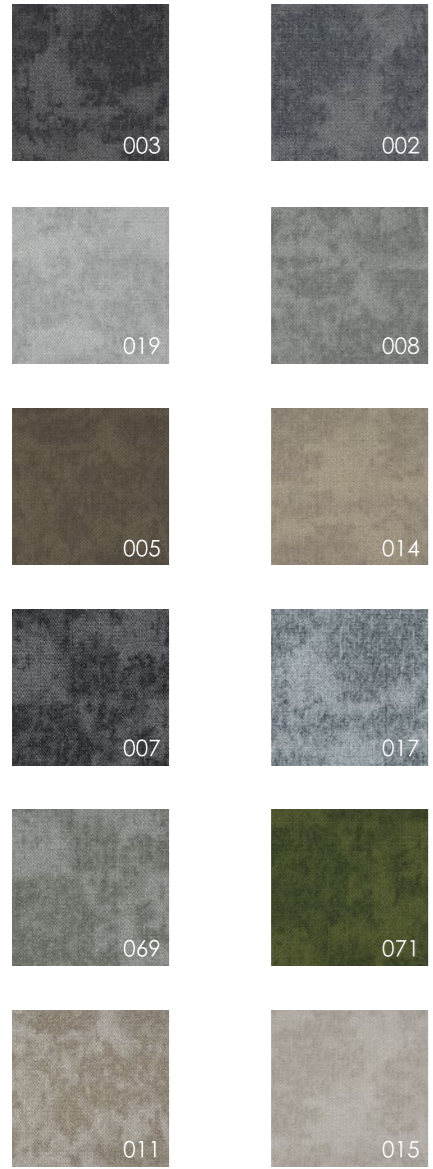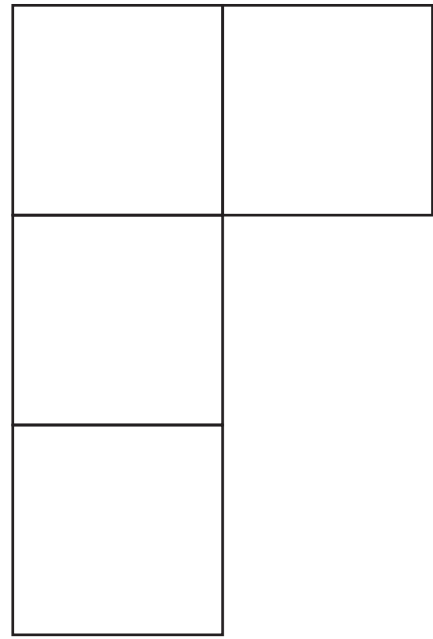





**BETTER PRODUCTS**

**NICE WORK**

**HAPPIER LIFE**


**PERFECT MATCHING**

**INNOVATION SPACE**


**CARBON NEUTRAL**



**SET GOALS;**  
**THEN NEGOTIATE;**  
**REACH AN AGREEMENT DEAL;**

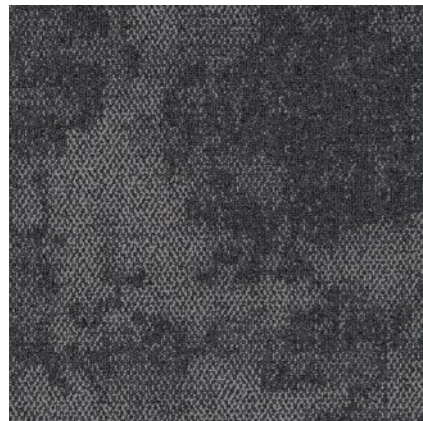

003

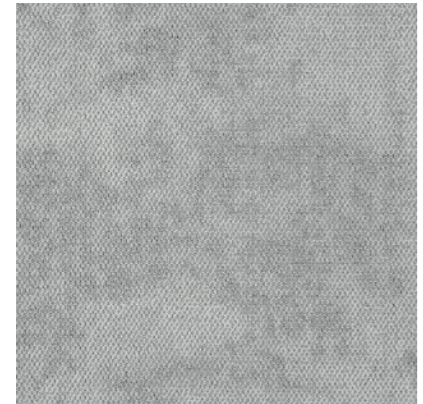

019









**INSPIRED BY  
ROCK FORMATIONS  
FROM  
AROUND THE WORLD  
12 DIFFERENT  
COLORS CREATE A  
TRANQUIL,  
SOOTHING BASE FOR  
ANY SPACE.**







Color Your Space

**Innovflor®**

**GALAXY F**

**SPECIFICATION:**

Face yarn:	100% Nylon
Dye method:	100% Solution dyed
Gauge:	1/12
Pile weight:	550g/m <sup>2</sup> (± 5%)
Total weight:	4850g/m <sup>2</sup> (± 5%)
Pile height:	5.6/4.3/3.8/2.8mm (± 0.5mm)
Total height:	6.5mm (± 0.5mm)
Backing:	PVC
Size:	50cm*50cm
Dimensional stability:	≤ 0.2%
Packaging box:	20 tiles/ 5 m <sup>2</sup> , pallet 200 m <sup>2</sup>

**PERFORMANCE**

Classification:	33
Castor chair rating:	A: intensive use
Fire classification :	Bf1-S1
Soil resistance :	2-3 grade ISO11378-2: 2001
Permanent antistatic:	≤ 2kv AATCC134-2016
Impact sound insulation:	ΔL <sub>w</sub> : 26 dB
Sound absorption:	Frequency Hz: 125 250 500 1000 2000 4000 α <sub>s</sub> 0.01 0.05 0.08 0.22 0.34 0.44
Noise reduction:	α <sub>w</sub> : 0.20
Colour fastness to light:	6 grade QB/T 2755-2005
Colour fastness to water:	4-5 grade QB/T 2755-2005
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality:	(GB18587-2001 A grade) TVOC ≤ 0.500mg/m <sup>2</sup> h Formaldehyde ≤ 0.050mg/m <sup>2</sup> h Styrene ≤ 0.400mg/m <sup>2</sup> h 4-phenylcyclohexene ≤ 0.050mg/m <sup>2</sup> h


014/015




003



002



019



008



005



014



007



017




069



071




011




015


Installation method




Ashlar



Brick



Monolithic



Quarter Turn

