



C H E R O K E E



CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable
DYE METHOD	Solution Dyed
PILE WEIGHT	780g/m ²
NUMBER OF TUFTS	260700/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5mm - 6.0mm
TOTAL HEIGHT	8.00mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE




CHEROKEE - CC-726



CHEROKEE - CC-746




CHEROKEE - CC-747




CHEROKEE - CC-748




CHEROKEE - CC-759




CHEROKEE - CC-776



CHEROKEE - CC-777




CHEROKEE - CC-779




CHEROKEE - CC-794




CHEROKEE - CC-795




CHEROKEE - 726



CHEROKEE - 746




CHEROKEE - 747




CHEROKEE - 748




CHEROKEE - 759




CHEROKEE - 776




CHEROKEE - 777



CHEROKEE - 779



CHEROKEE - 794




CHEROKEE - 795






HOW TO INSTALL

QUARTER TURN

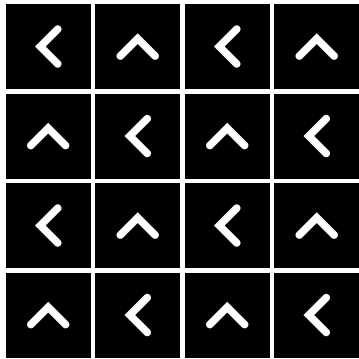

BRICK

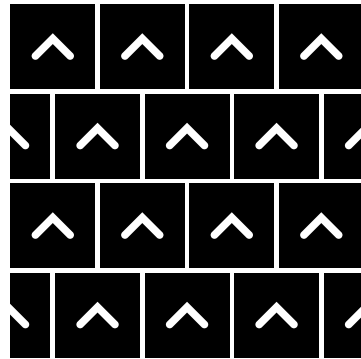



Standard
CARPETS

www.standardcarpets.com