

# VERSA™

DESIGNED SURFACES

Since 1950

## Compass West

Type II

**Fabric Backed Vinyl Wallcovering**

# COMPASS

WEST

by LSI WALLCOVERING

## A SPECIAL COLLECTION FROM AN AWARD-WINNING STUDIO

LSI Wallcovering, an established leader in commercial vinyl wallcoverings, introduces Compass West: an exclusive collection of distinctive embossed textures and uniquely designed prints manufactured to the highest quality standards in the USA.

Designed by the award-winning LSI Studio, Compass West features a broad range of delicate grass effects and silks paired with dramatic graphic prints. The collection offers an appealing palette of neutrals, rich deep accent colors and metallic finishes that will enhance any interior space.


Compass West is available in over 60 countries around the world through our global distribution network.

Visit [lsiwallcovering.com](http://lsiwallcovering.com) for technical information.







Masterpiece

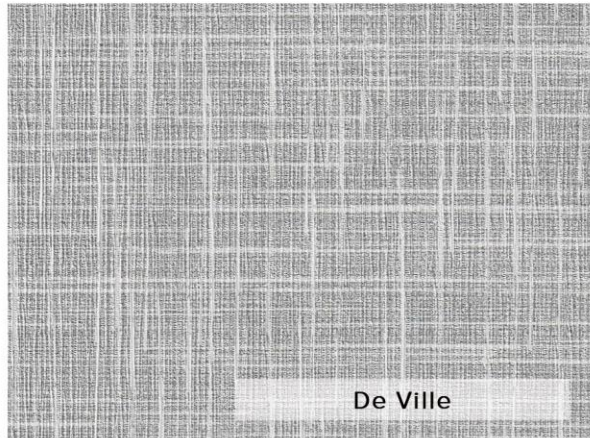


De Ville

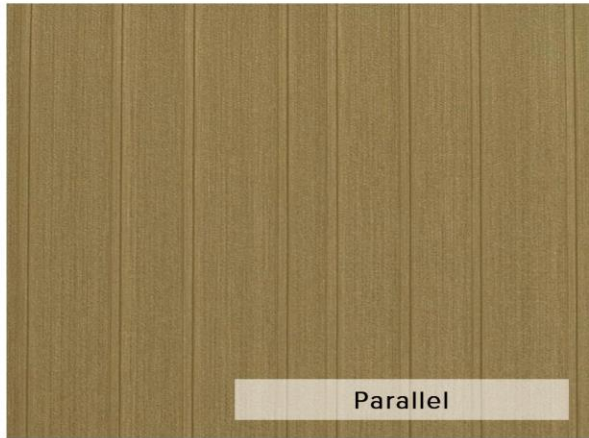

Parallel

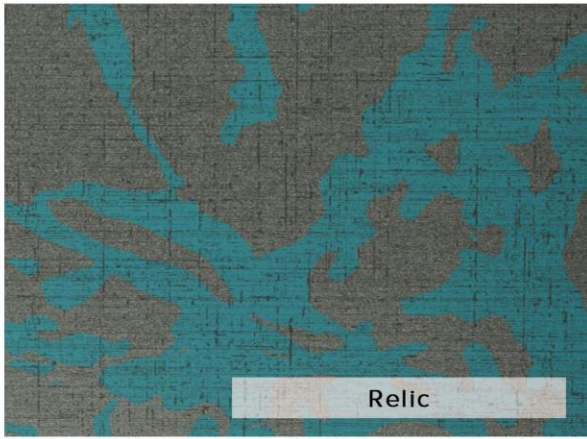

Relic

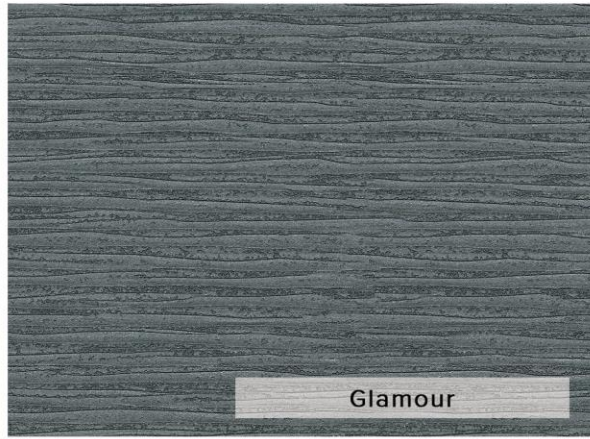


Glamour



Meryl



Logan

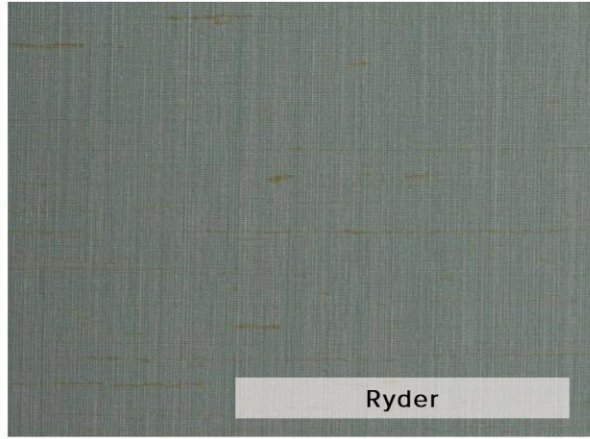

Ryder



Bermuda



COMPASS  
— WEST —

# Masterpiece



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – download
- Warranty – download
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**CCW-201**



**CCW-202**



**CCW-203**



**CCW-204**



**CCW-205**



**CCW-206**

# De Ville



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – download
- Warranty – download
- Paking: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes


- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0




燃烧性能等级标识





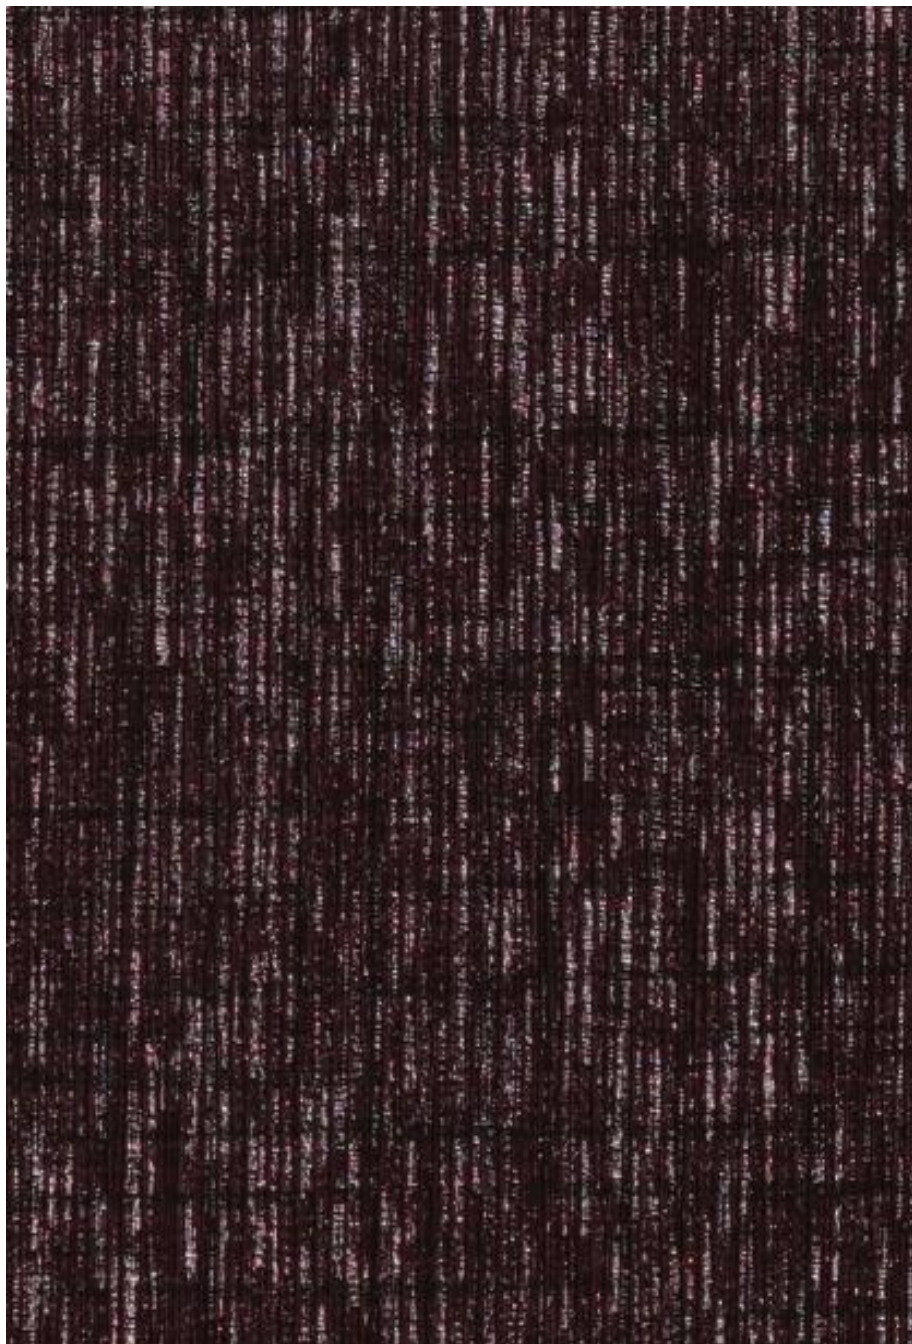

**CCW-207**

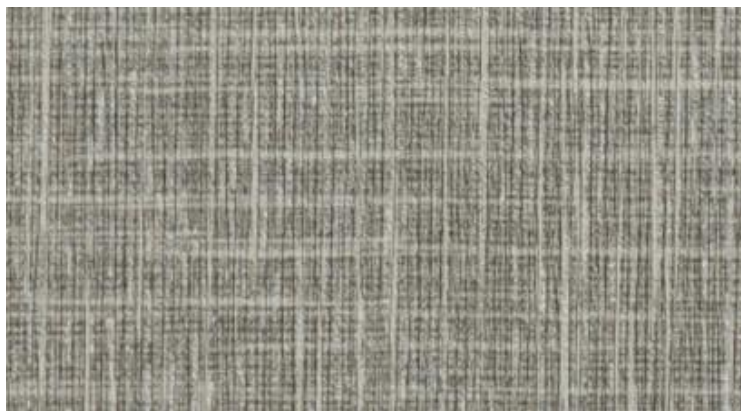

**CCW-208**



**CCW-209**



**CCW-210**



**CCW-211**



**CCW-212**

# Parallel



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty – [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**CCW-213**



**CCW-214**



**CCW-215**



**CCW-216**



**CCW-217**



**CCW-218**

# Relic



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing– Osnaburg
- Installation – Reverse hang / Random
- Weight –20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty– [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**CCW-219**



**CCW-220**



**CCW-221**



**CCW-222**

# Glamour



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty – [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**CCW-223**



**CCW-224**



**CCW-225**



**CCW-226**



**CCW-227**



**CCW-228**

# Meryl



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty – [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes


- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





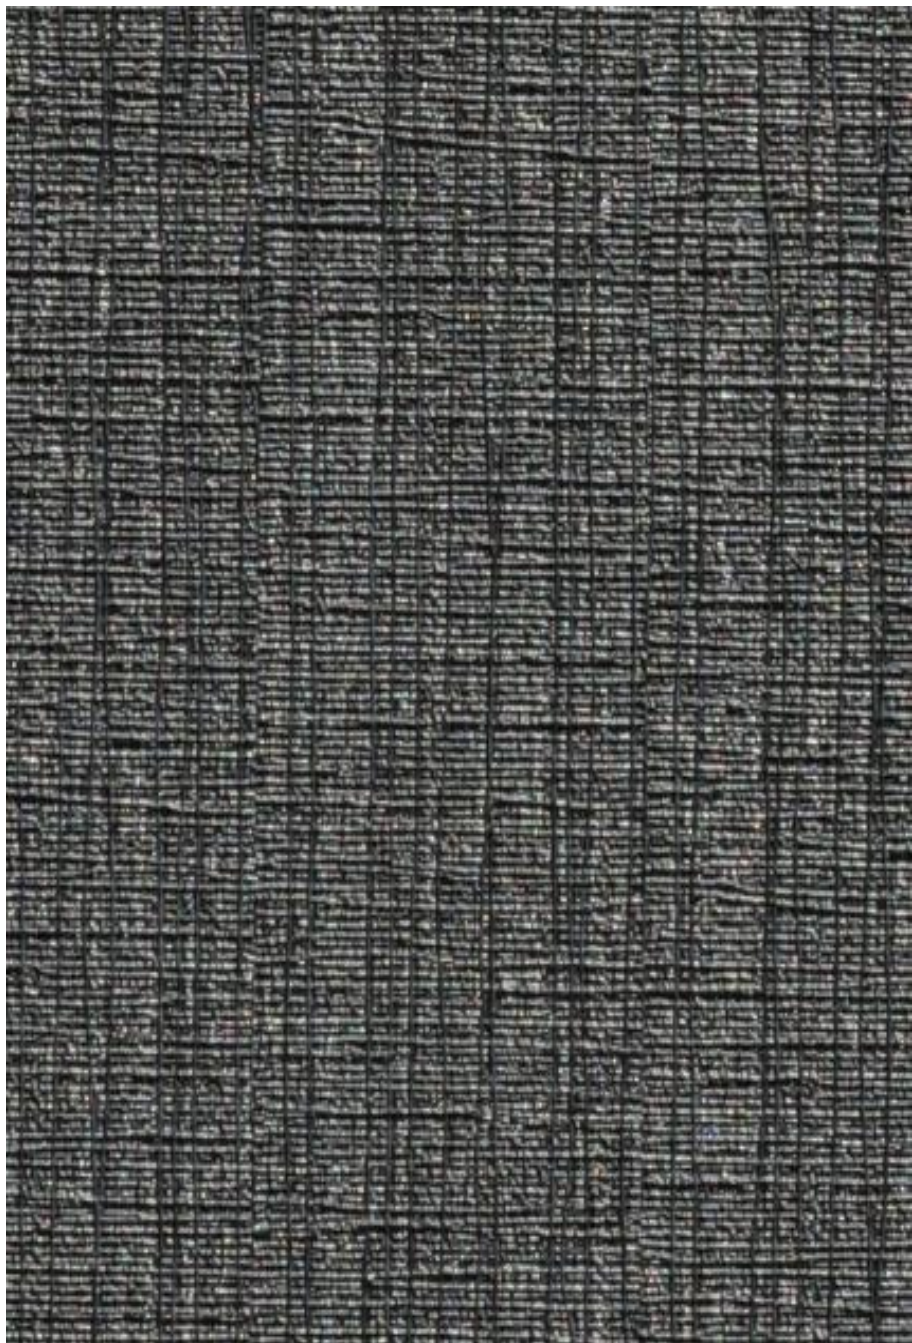

**CCW-229**



**CCW-230**



**CCW-231**



**CCW-232**



**CCW-233**



**CCW-234**

# Logan



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty – [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001


## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识



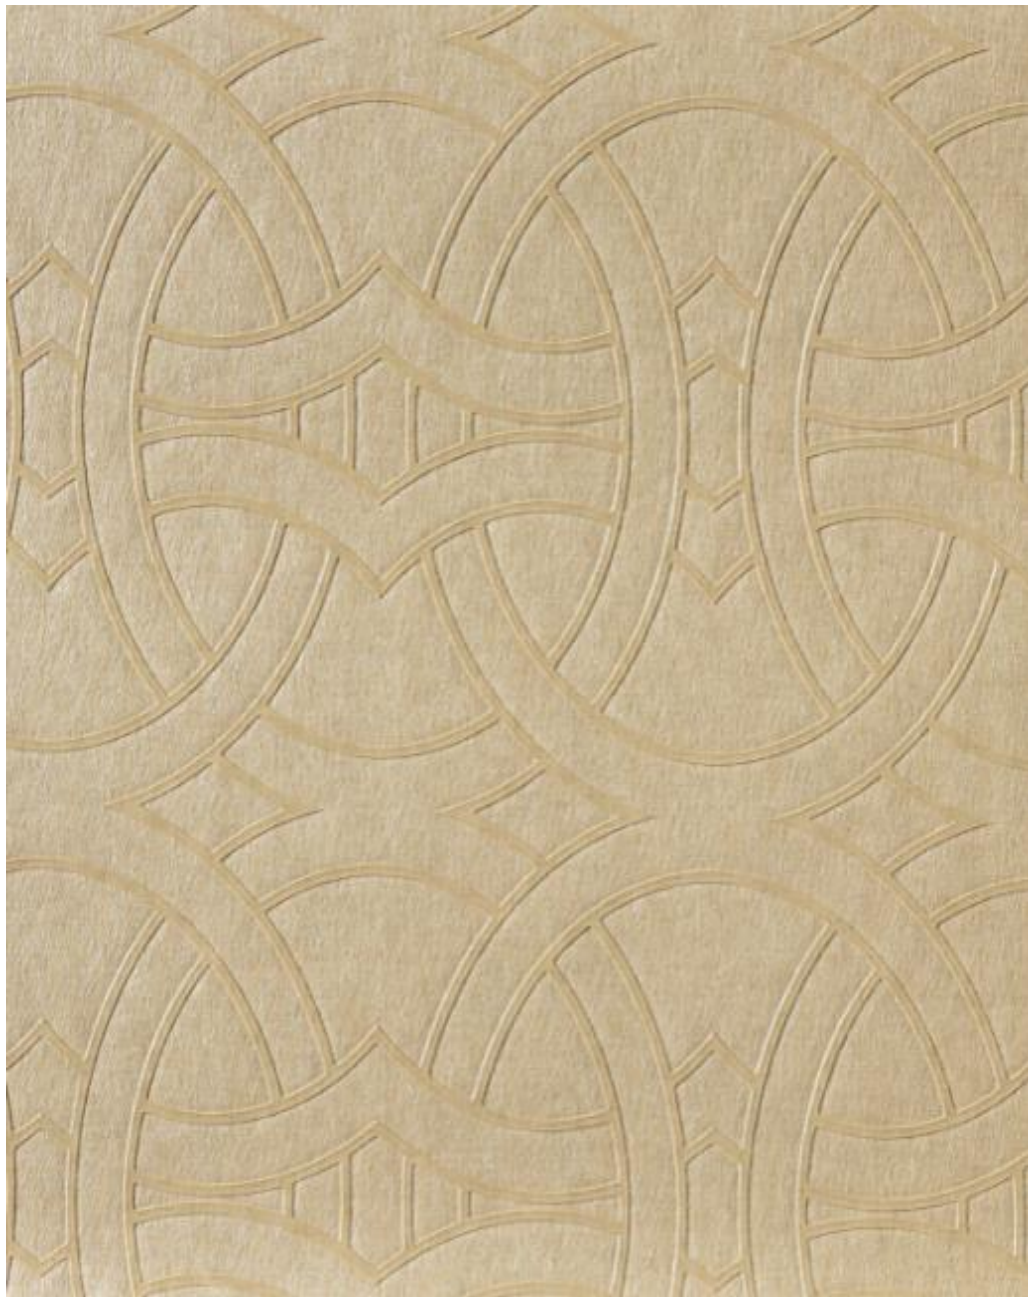

**CCW-235**



**CCW-236**



**CCW-237**



**CCW-238**

# Ryder



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty – [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001


## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识



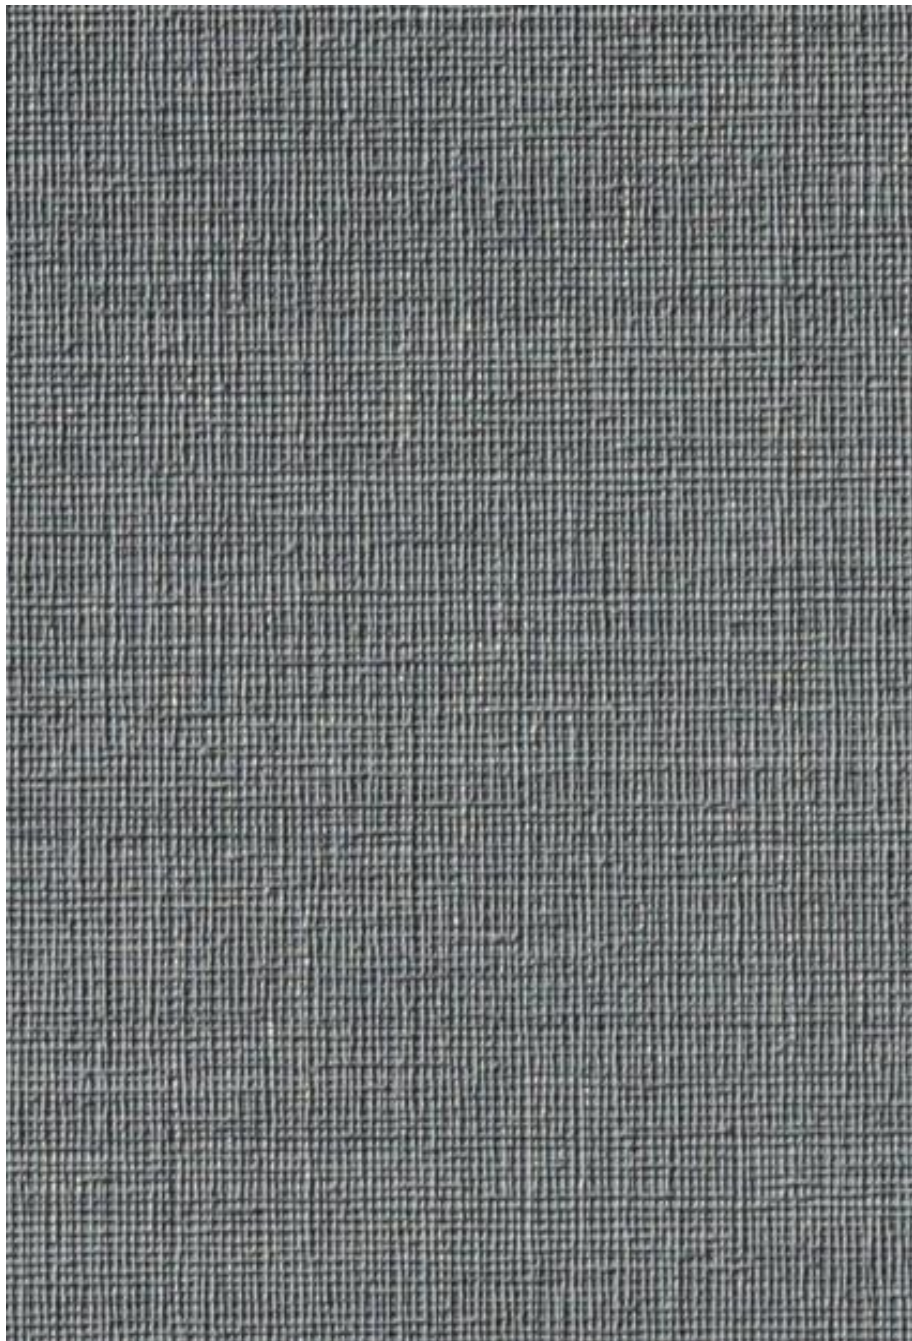

**CCW-239**



**CCW-240**



**CCW-241**



**CCW-242**



**CCW-243**



**CCW-244**



**CCW-245**

# Bermuda



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse hang / Random
- Weight – 20 OZ/LY (456 gr/m<sup>2</sup>)
- Hanging Instructions – [download](#)
- Warranty – [download](#)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**CCW-246**



**CCW-247**



**CCW-248**



**CCW-249**



**CCW-250**

# INDEX

Pattern Name	Pattern Numbers	Weight	Backing	Installation
Masterpiece	CCW-201 - 206	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Non-Reverse/Random Match
De Ville	CCW-207 - 212	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Reverse/Random Match
Parallel	CCW-213 - 218	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Reverse/Random Match
Relic	CCW-219 - 222	20 oz/ly (456 gr/m <sup>2</sup> )	Non-Woven	Reverse/Drop match at arrows (Drop match: 6" V)
Glamour	CCW-223 - 228	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Reverse/Random Match
Meryl	CCW-229 - 234	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Non-Reverse/Random Match
Logan	CCW-235 - 238	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Reverse/Straight Across Match
Ryder	CCW-239 - 245	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Reverse/Random Match
Bermuda	CCW-246 - 250	20 oz/ly (456 gr/m <sup>2</sup> )	Osnaburg	Reverse/Random Match

## SPECIFICATIONS

- 52-54" (132/137 cm) width.
- Meets/Exceeds CCC-W-408D & W101 Specifications
- High tear and tensile strength
- Highly cleanable & stain resistant
- Fire Certification - Class A - ASTM E84
- Fire Certification-GB8624-2012-B1(B-s2,d0, t0)
- Color fast water-based inks
- Low VOC CA01350 (Indoor Air Quality)
- No formaldehyde or heavy metals
- Meets/Exceeds GB18185-2001 Standard for harmful substances
- Non-ortho phthalate plasticizers
- Visit [Isiwallcovering.com](http://Isiwallcovering.com) for technical information.

## WARRANTY

Compass products are guaranteed to be free of defects in workmanship and materials for five years.

**COMPASS**  
— WEST —