

COMOUFLAGE



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	800 g/m ²
NUMBER OF TUFTS	248850/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm
TOTAL PILE HEIGHT	6.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic



SPECIFICATIONS


COLOURLINE



CAMOUFLAGE - 840




CAMOUFLAGE - 842



CAMOUFLAGE - 843



CAMOUFLAGE - 855




CAMOUFLAGE - 859



CAMOUFLAGE - 870



CAMOUFLAGE - 873



CAMOUFLAGE - 874



CAMOUFLAGE - 875



CAMOUFLAGE - 877



CAMOUFLAGE - 879




CAMOUFLAGE - 896






HOW TO INSTALL

QUARTER TURN

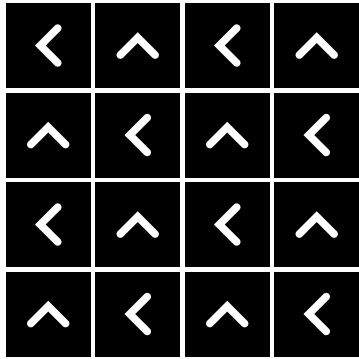

MONOLITHIC

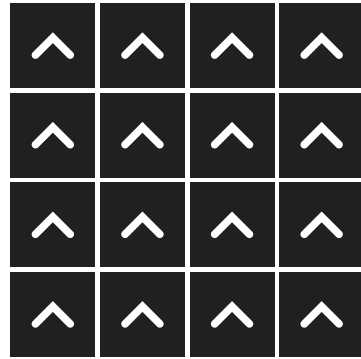



Standard
CARPETS

www.standardcarpets.com