



CHAKRA

CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable
DYE METHOD	Solution Dyed
PILE WEIGHT	780g/m2
NUMBER OF TUFTS	260700/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5mm / 5.0mm / 5.5 mm / 6.0mm
TOTAL HEIGHT	8.00mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or BrickV

SPECIFICATIONS

COLOURLINE




CHAKRA - CC-726




CHAKRA - CC-746




CHAKRA - CC-747




CHAKRA - CC-748




CHAKRA - CC-759




CHAKRA - CC-776




CHAKRA - CC-777




CHAKRA - CC-779



CHAKRA - CC-794



CHAKRA - CC-795




CHAKRA - 726



CHAKRA - 746



CHAKRA - 747




CHAKRA - 748




CHAKRA - 759




CHAKRA - 776



CHAKRA - 777




CHAKRA - 779




CHAKRA - 794




CHAKRA - 795

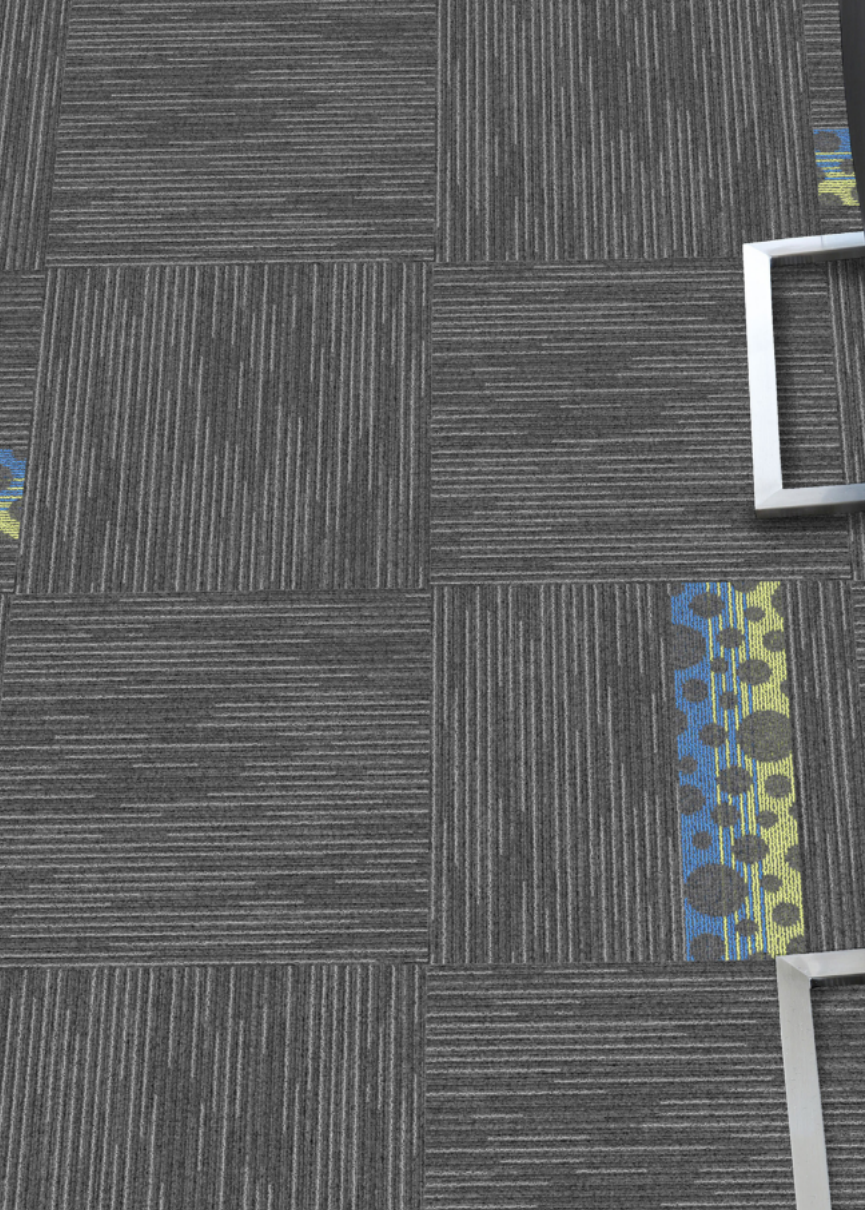

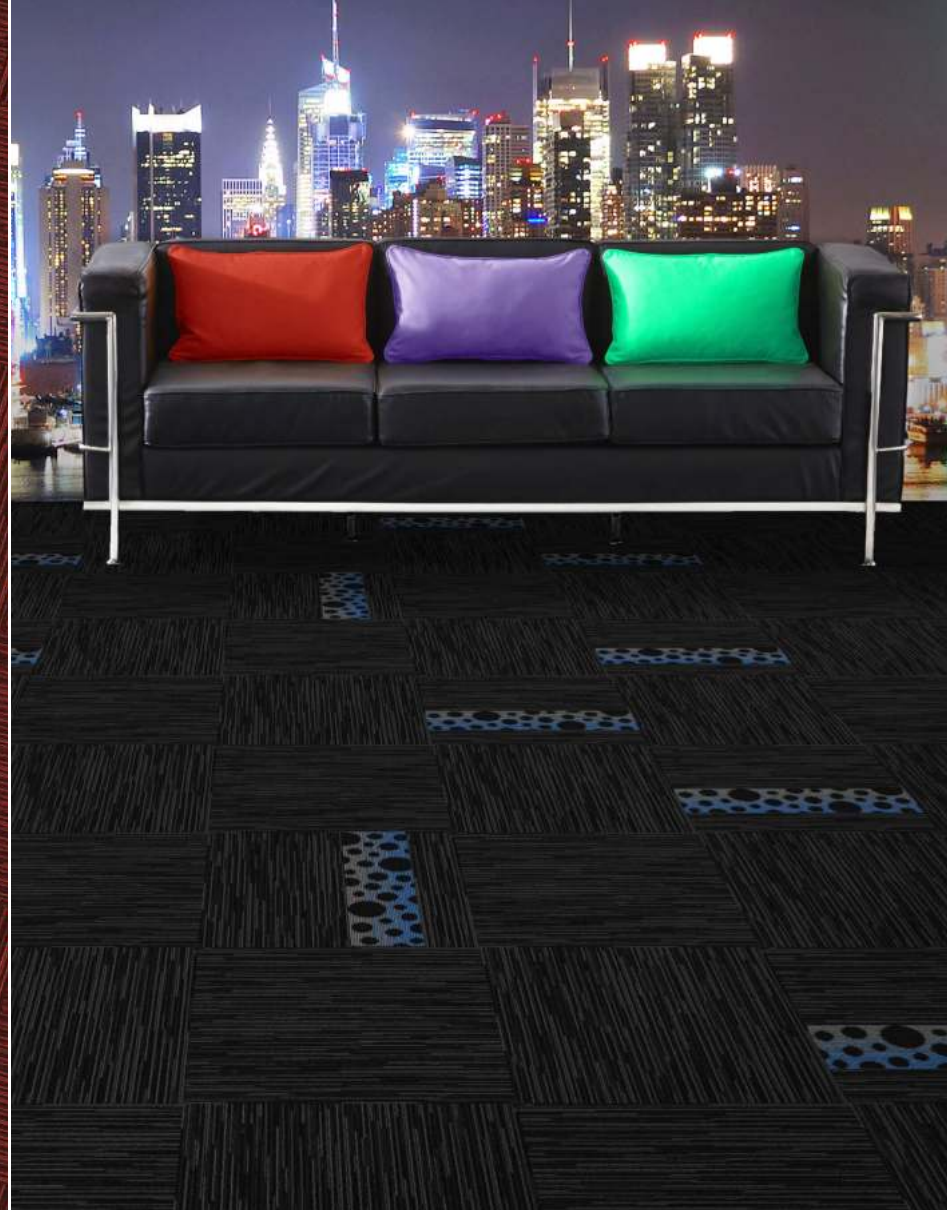


HOW TO INSTALL

QUARTER TURN

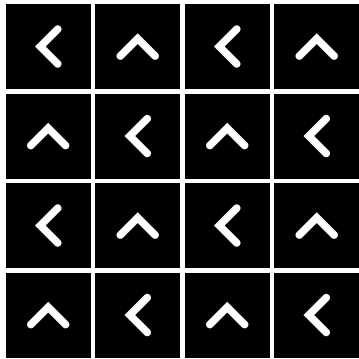

BRICK

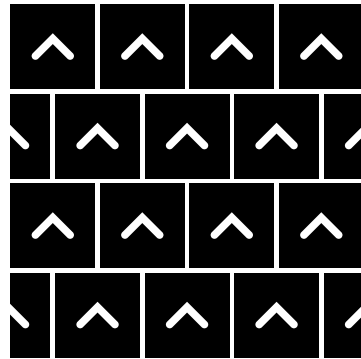



Standard
CARPETS

www.standardcarpets.com