



CITY WALK

CONSTRUCTION	LOOP PILE TIP SHEARED
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	850 g/m ²
NUMBER OF TUFTS	118500/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKING	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	25 cm x 100 cm
PILE HEIGHT	3.5 mm / 8.0 mm
TOTAL PILE HEIGHT	9.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn, Herringbone, Ashlar, Semi Ashlar or Random Plank



SPECIFICATIONS

COLOURLINE



CITY WALK - 945



CITY WALK - 947



CITY WALK - 950



CITY WALK - 955



CITY WALK - 957




CITY WALK - 970



CITY WALK - 972



CITY WALK - 974

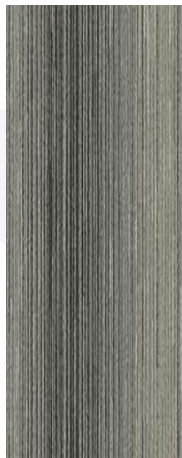

CITY WALK - 975



CITY WALK - 976




CITY WALK - 978



CITY WALK - 994




CITY WALK - 995

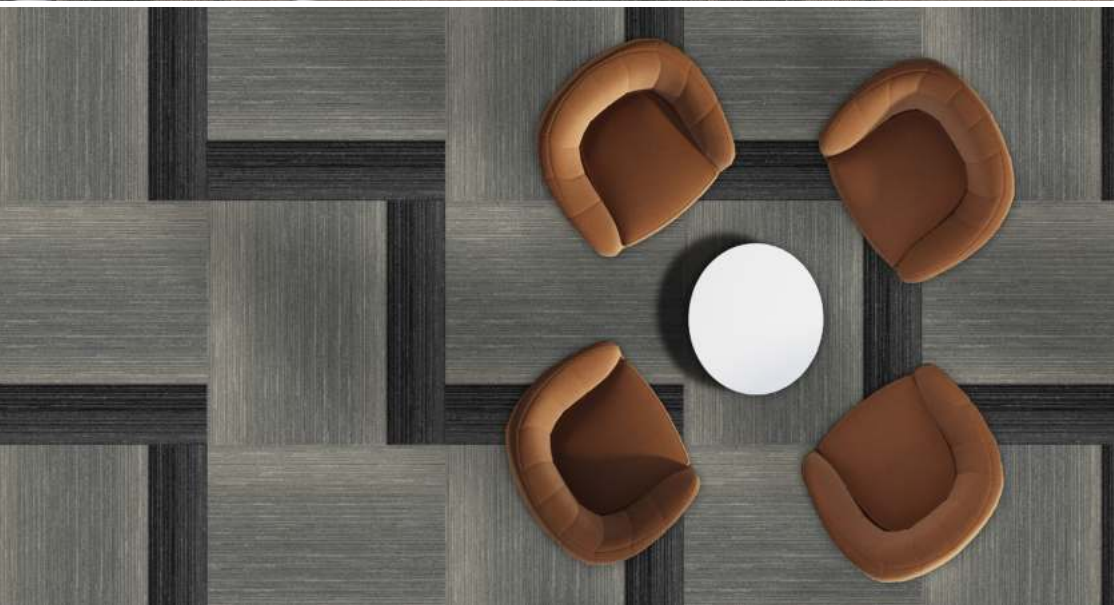




HOW TO INSTALL


ASHLAR



SEMI ASHLAR




QUARTER TURN



HERRINGBONE



RANDOM





Standard
CARPETS

www.standardcarpets.com