




CONNECT






CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	780 g/m ²
NUMBER OF TUFTS	222780/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	4.0 mm / 5.00 mm
TOTAL PILE HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS


COLOURLINE




CONNECT - 742




CONNECT - 755




CONNECT - 756




CONNECT - 759



CONNECT - 774




CONNECT - 777



CONNECT - 779




CONNECT - 793




CONNECT - 794



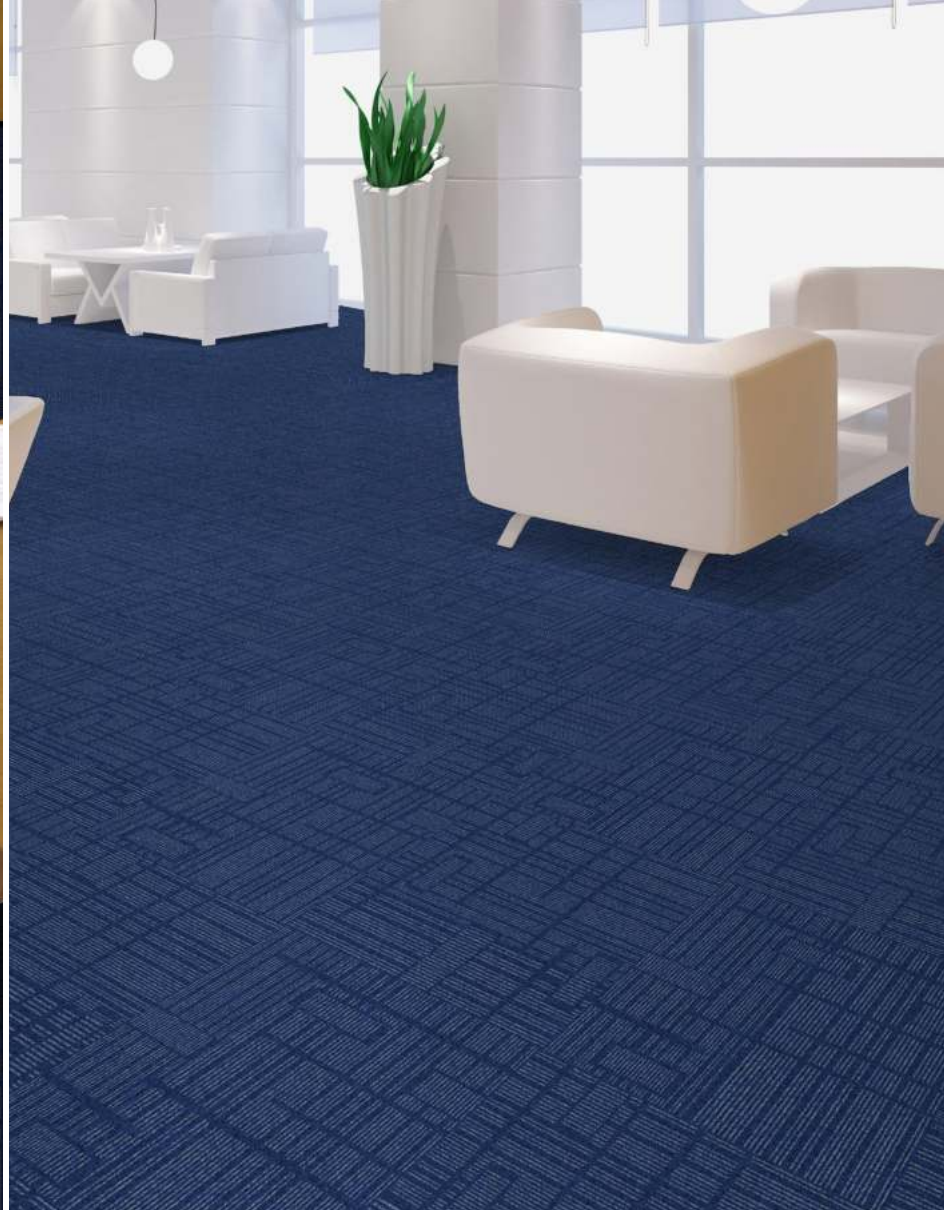


HOW TO INSTALL

QUARTER TURN

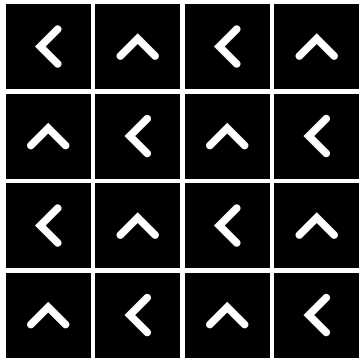

MONOLITHIC

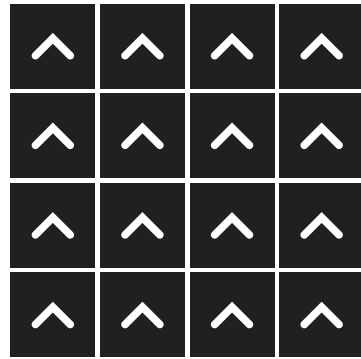



Standard
CARPETS

www.standardcarpets.com