



FEEDBACK




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	Cable
DYE METHOD	Solution Dyed
PILE WEIGHT	610 g/m <sup>2</sup>
NUMBER OF TUFTS	184860/m <sup>2</sup>
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	<b>StableShield</b> - 100% Vinyl
OPTIONAL BACKING	<b>Recova</b> -PU Cushion, <b>EcoShield</b> -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.3 mm / 5.5 mm
TOTAL PILE HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

S P E C I F I C A T I O N



# COLOURLINE



FEEDBACK - 745



FEEDBACK - 748



FEEDBACK - 754




FEEDBACK - 757




FEEDBACK - 764




FEEDBACK - 767




FEEDBACK - 775



FEEDBACK - 776





FEEDBACK - 777



FEEDBACK - 779




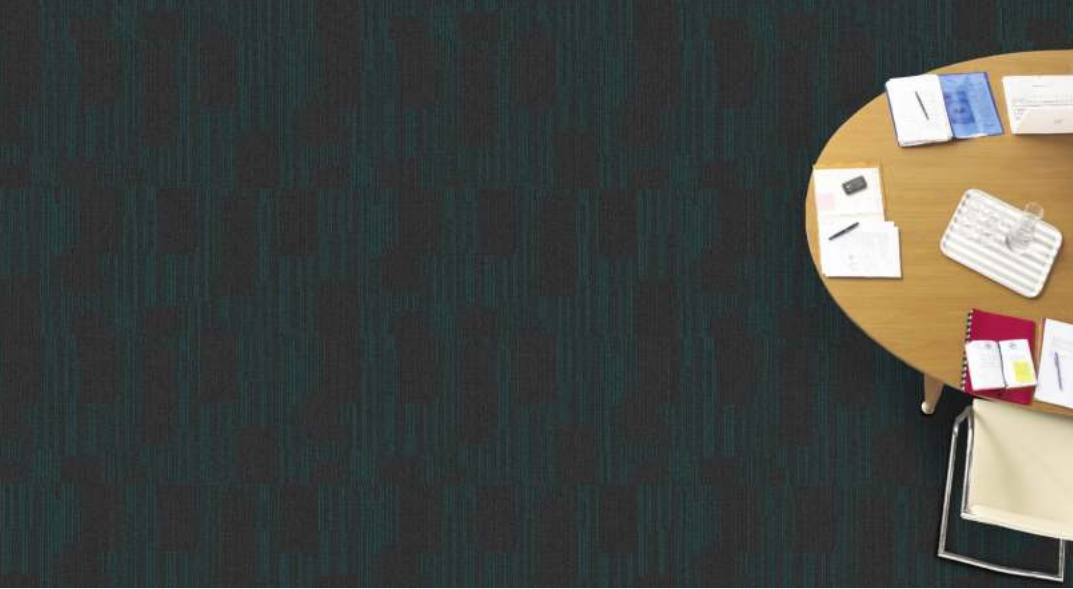

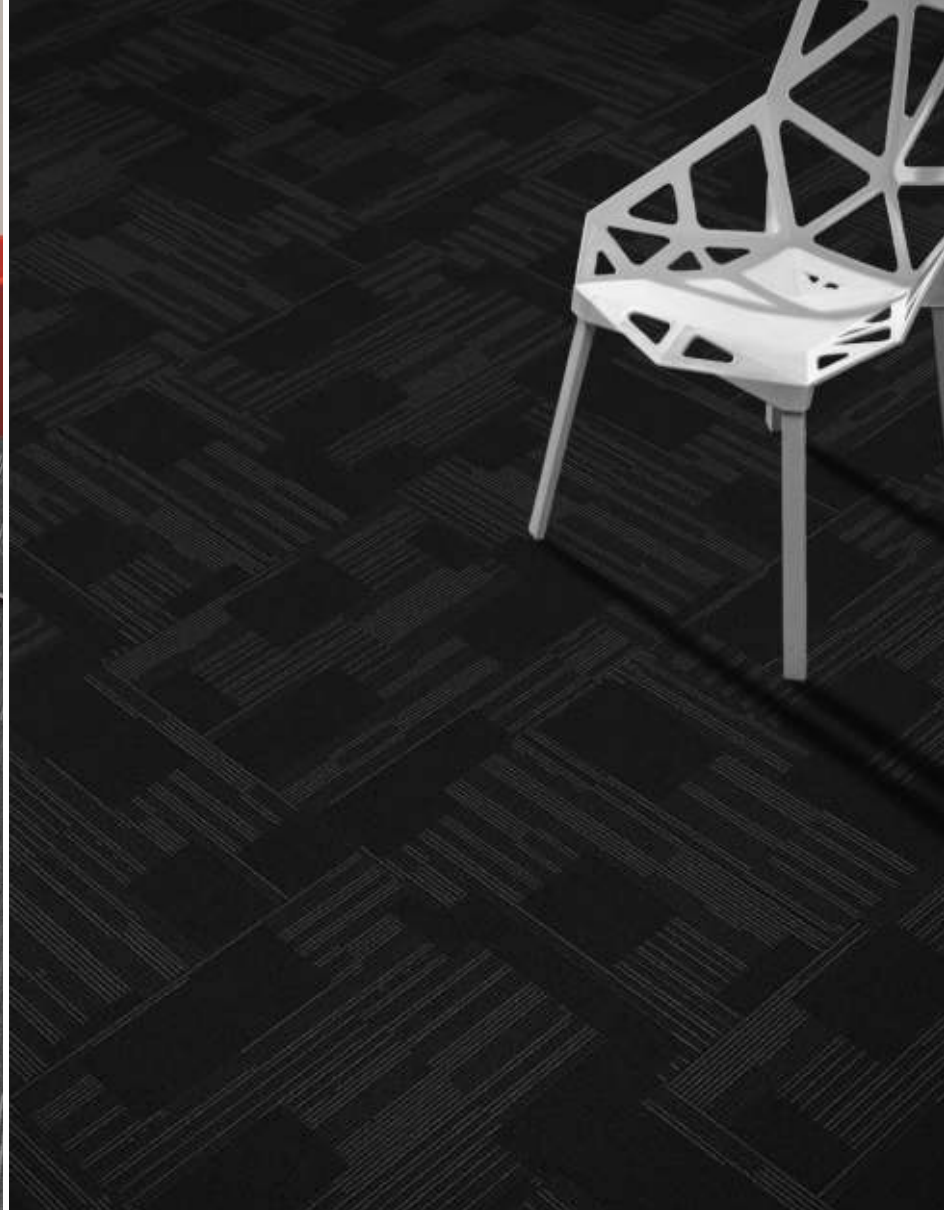


# HOW TO INSTALL

**QUARTER TURN**

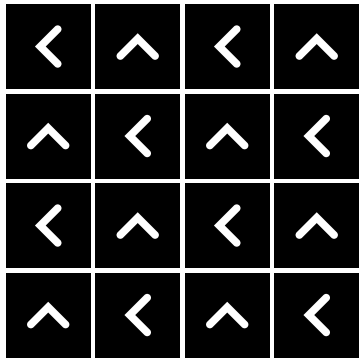

**BRICK**

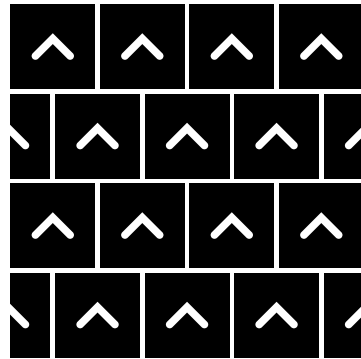





Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)