


INTER
CHANGE



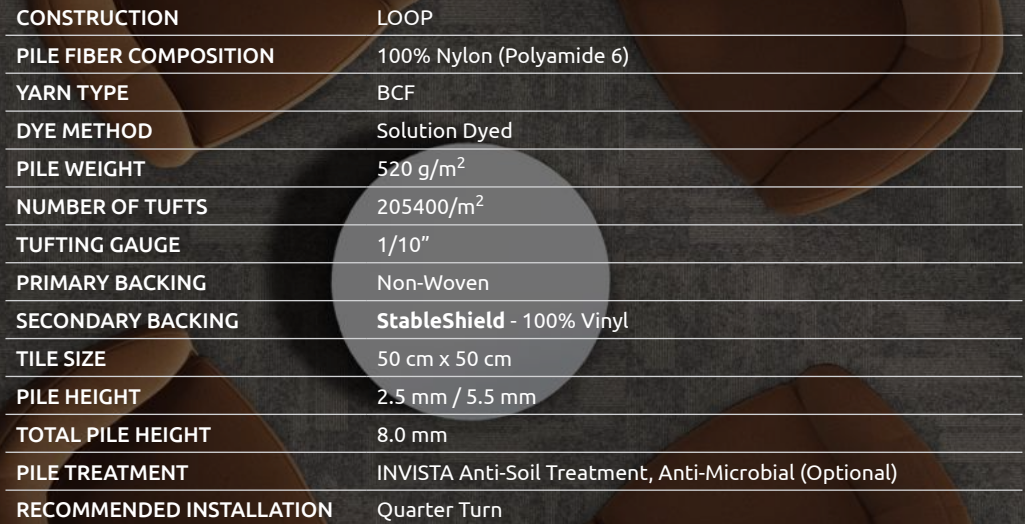


CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	520 g/m ²
NUMBER OF TUFTS	205400/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5 mm / 5.5 mm
TOTAL PILE HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATIONS


COLOURLINE




INTERCHANGE - 546




INTERCHANGE - 547




INTERCHANGE - 555




INTERCHANGE - 556



INTERCHANGE - 573



INTERCHANGE - 575




INTERCHANGE - 578





HOW TO INSTALL

QUARTER TURN

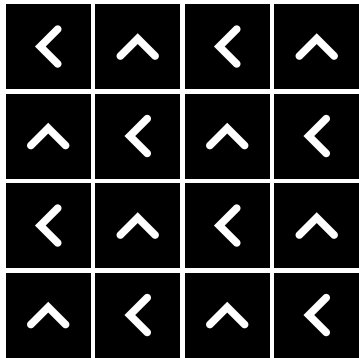



Standard
CARPETS

www.standardcarpets.com