




LIBERTY DRIVE

Construction	LOOP
Pile Fiber Composition	100% Solution Dyed Nylon
Yarn Type	BCF
Pile Weight	600 g/m ² (18 oz/yd ²)
Number of Tufts	197000/m ²
Tufting Gauge	1/10"
Primary Backing	Non-Woven
Secondary Backing	StableShield-100% Vinyl
Tile Size	50 cm x 50 cm (19.6" x 19.6")
Pile Height	3.5 mm
Total Tile Height	6.5 mm
Pile Treatment	INVISTA Anti-Soil Treatment (Optional)
Recommended Installation	Quarter Turn, Ashlar or Brick

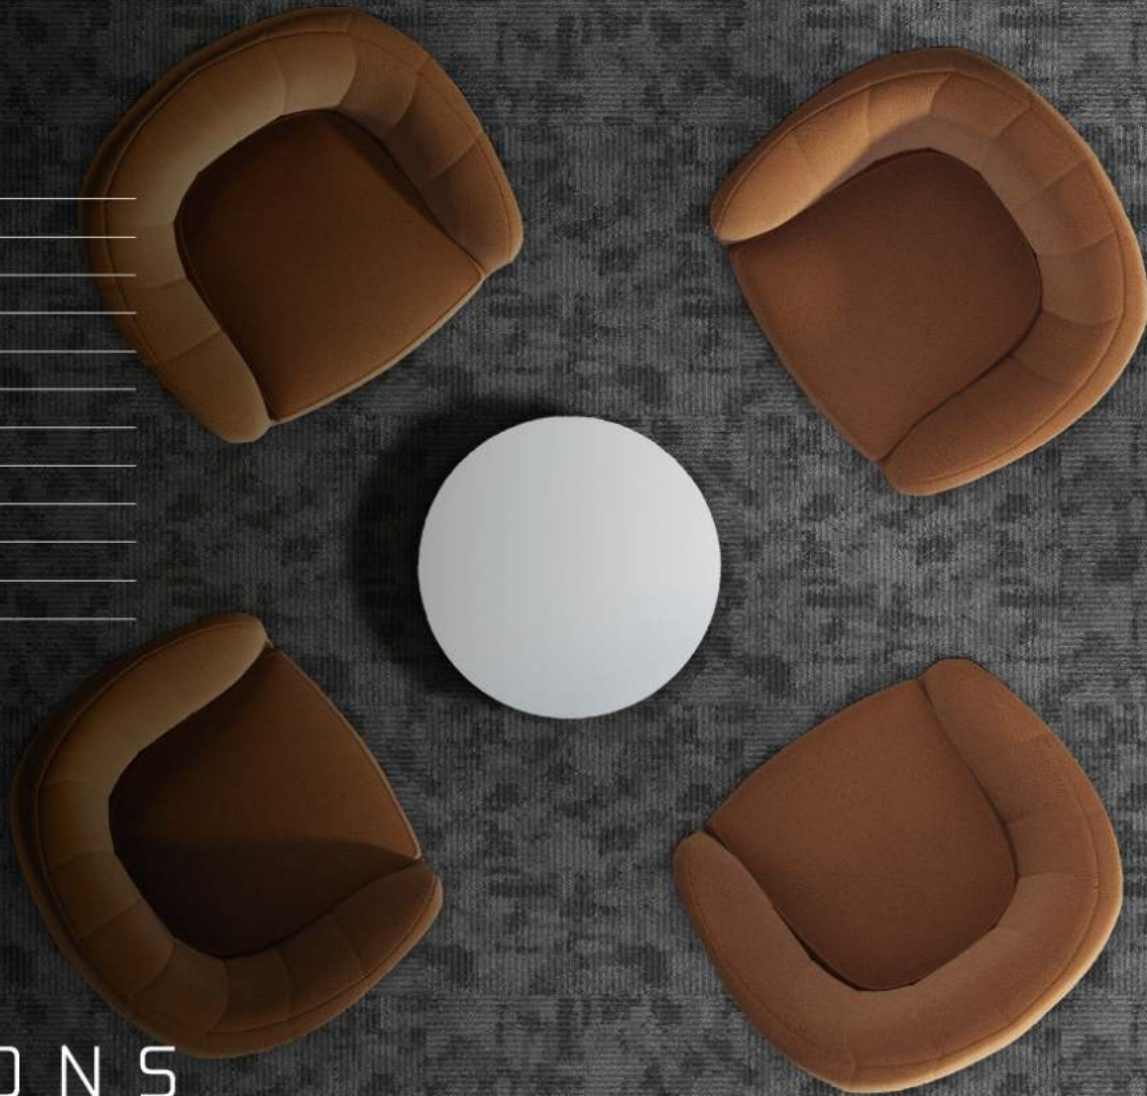

SPECIFICATIONS

COLOURLINE



Liberty Drive 645



Liberty Drive 647



Liberty Drive 648



Liberty Drive 657



Liberty Drive 673



Liberty Drive 674



Liberty Drive 678




Liberty Drive 695






HOW TO INSTALL


QUARTER TURN



BRICK



ASHLAR





Standard
CARPETS

www.standardcarpets.com