

PROXY






CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	650 g/m <sup>2</sup>
NUMBER OF TUFTS	189600/m <sup>2</sup>
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	<b>StableShield</b> - 100% Vinyl
OPTIONAL BACKINGS	<b>Recova</b> -PU Cushion, <b>EcoShield</b> -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 5.0 mm
TOTAL PILE HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

# SPECIFICATIONS

# COLOURLINE



PROXY - 697



PROXY - 658



PROXY - 673



PROXY - 675



PROXY - 676



PROXY - 677



PROXY - 678



PROXY - 679



PROXY - 692




PROXY - 696






# HOW TO INSTALL

**QUARTER TURN**

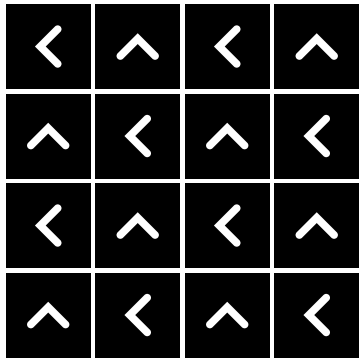

**MONOLITHIC**

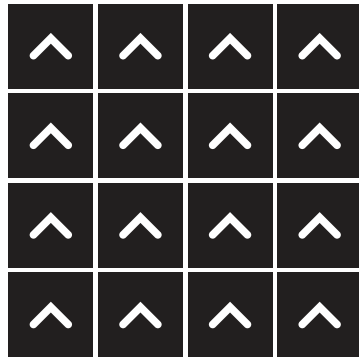



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)