



RADIANT




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	780 g/m <sup>2</sup>
NUMBER OF TUFTS	222780/m <sup>2</sup>
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	<b>StableShield</b> - 100% Vinyl
OPTIONAL BACKINGS	<b>Recova</b> -PU Cushion, <b>EcoShield</b> -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	4.0 mm / 5.00 mm
TOTAL PILE HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic



# SPECIFICATIONS


# COLOURLINE




RADIANT - 742



RADIANT - 744



RADIANT - 755



RADIANT - 756



RADIANT - 759




RADIANT - 777



RADIANT - 779




RADIANT - 793



RADIANT - 794



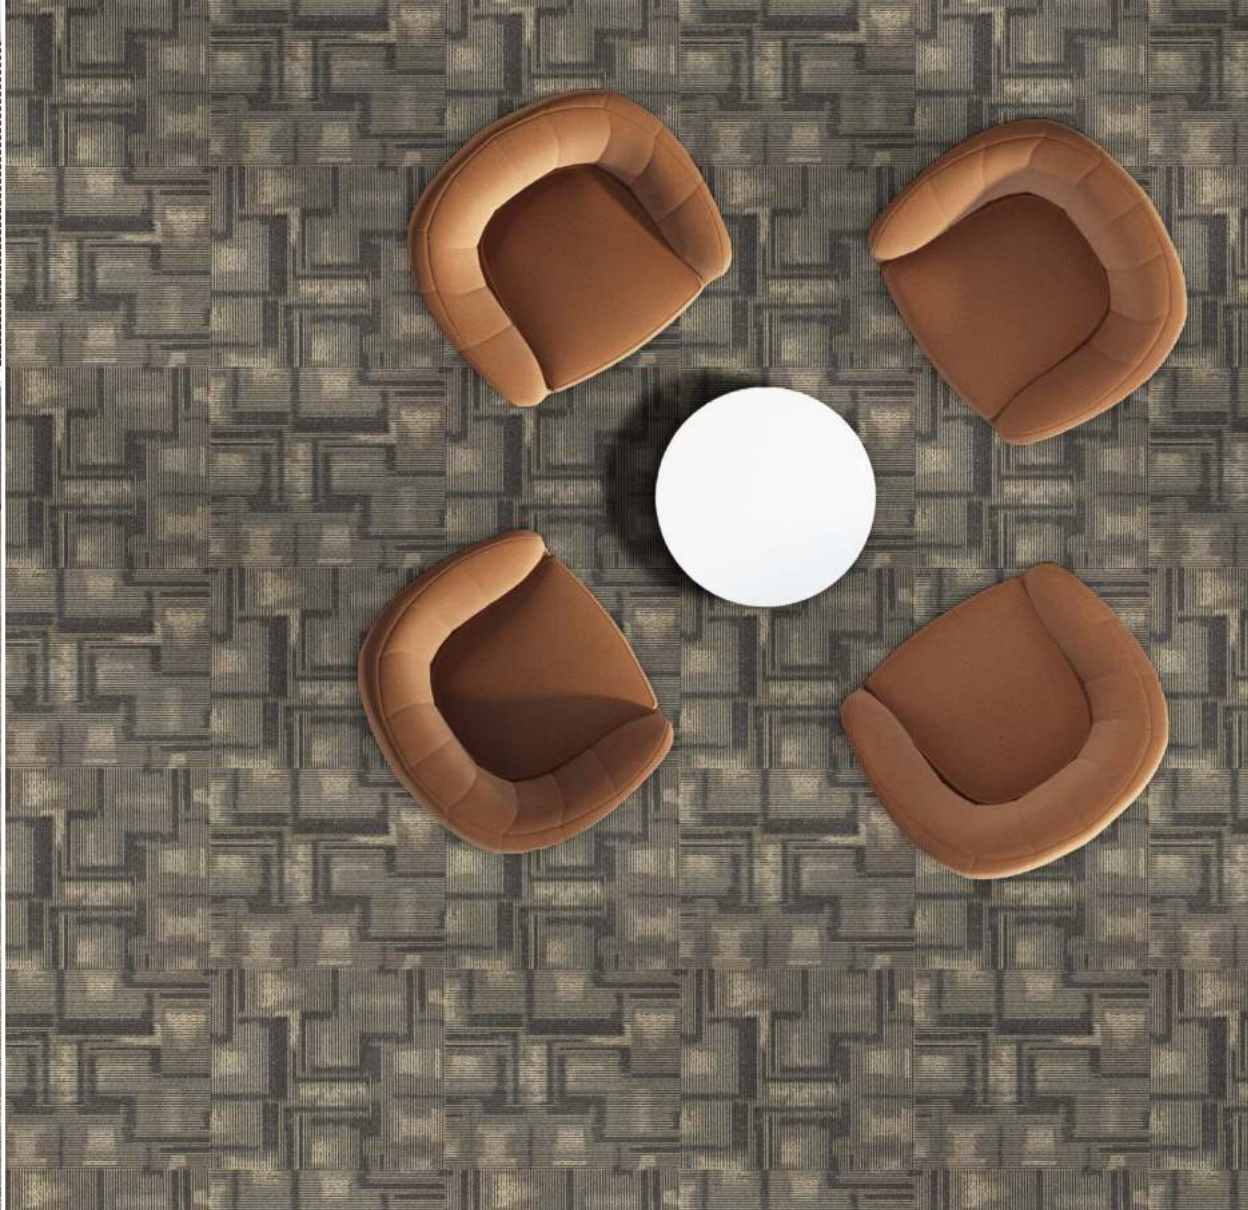







# HOW TO INSTALL

**QUARTER TURN**

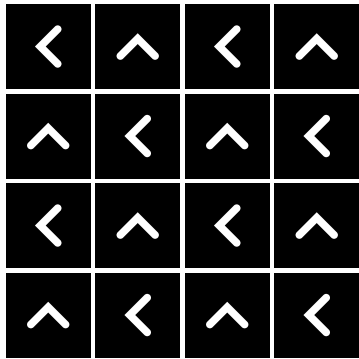

**MONOLITHIC**

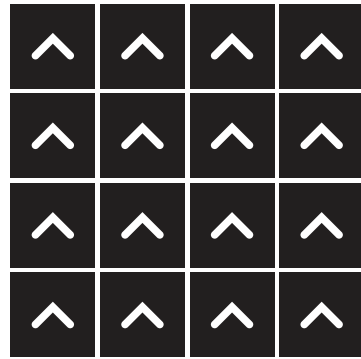



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)