

TEMPO





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	530 g/m ²
NUMBER OF TUFTS	197000/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm
TOTAL PILE HEIGHT	6.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE



TEMPO - 548



TEMPO - 557



TEMPO - 6543




TEMPO - 6545



TEMPO - 6547



TEMPO - 6557



TEMPO - 6571




TEMPO - 6576




TEMPO - 6578




TEMPO - 6579

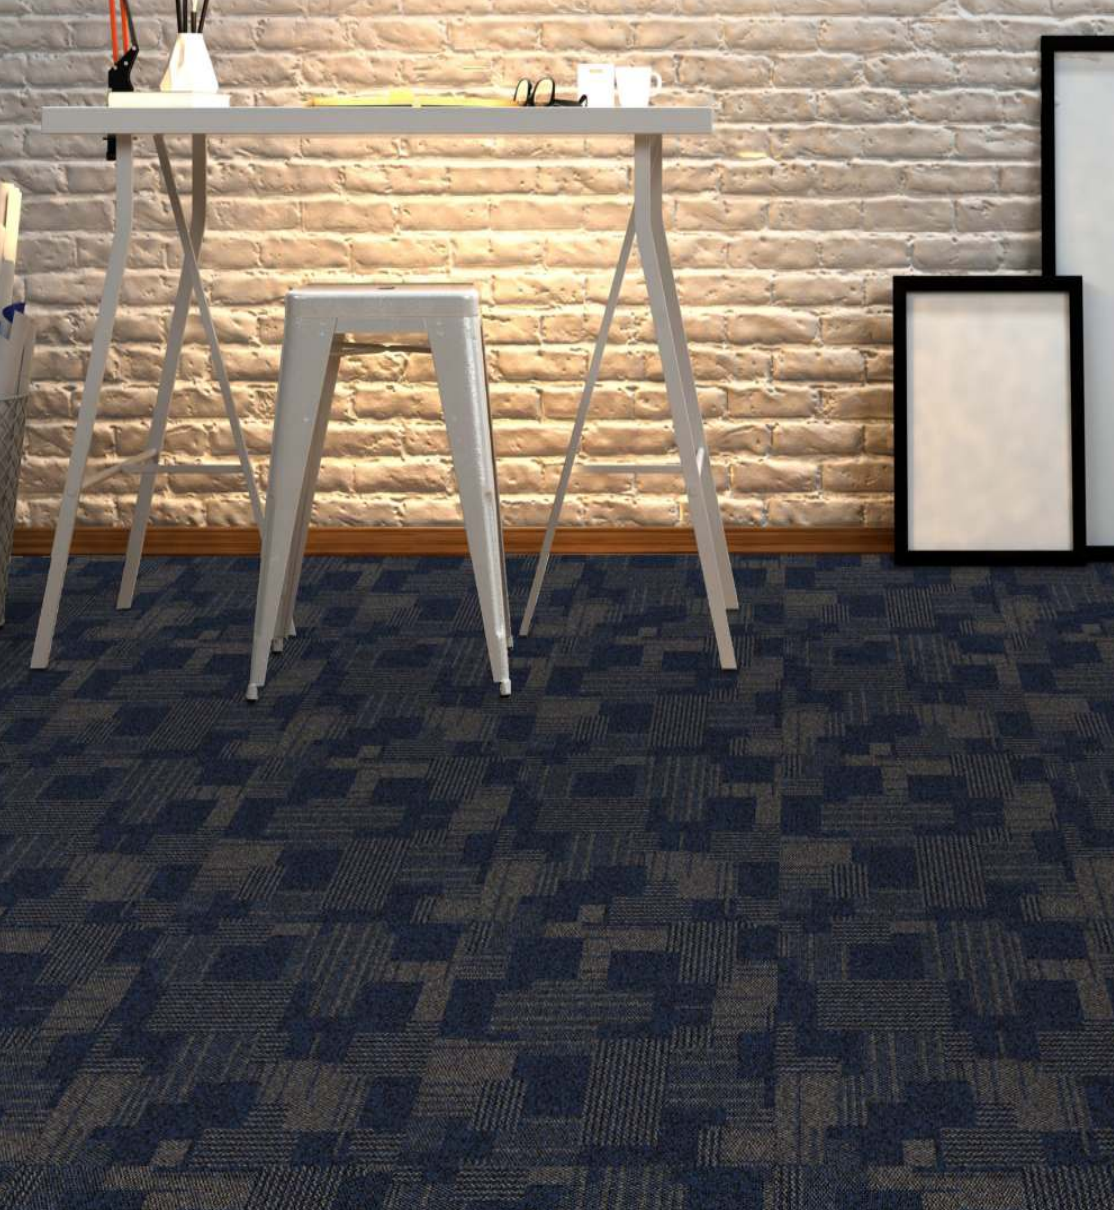

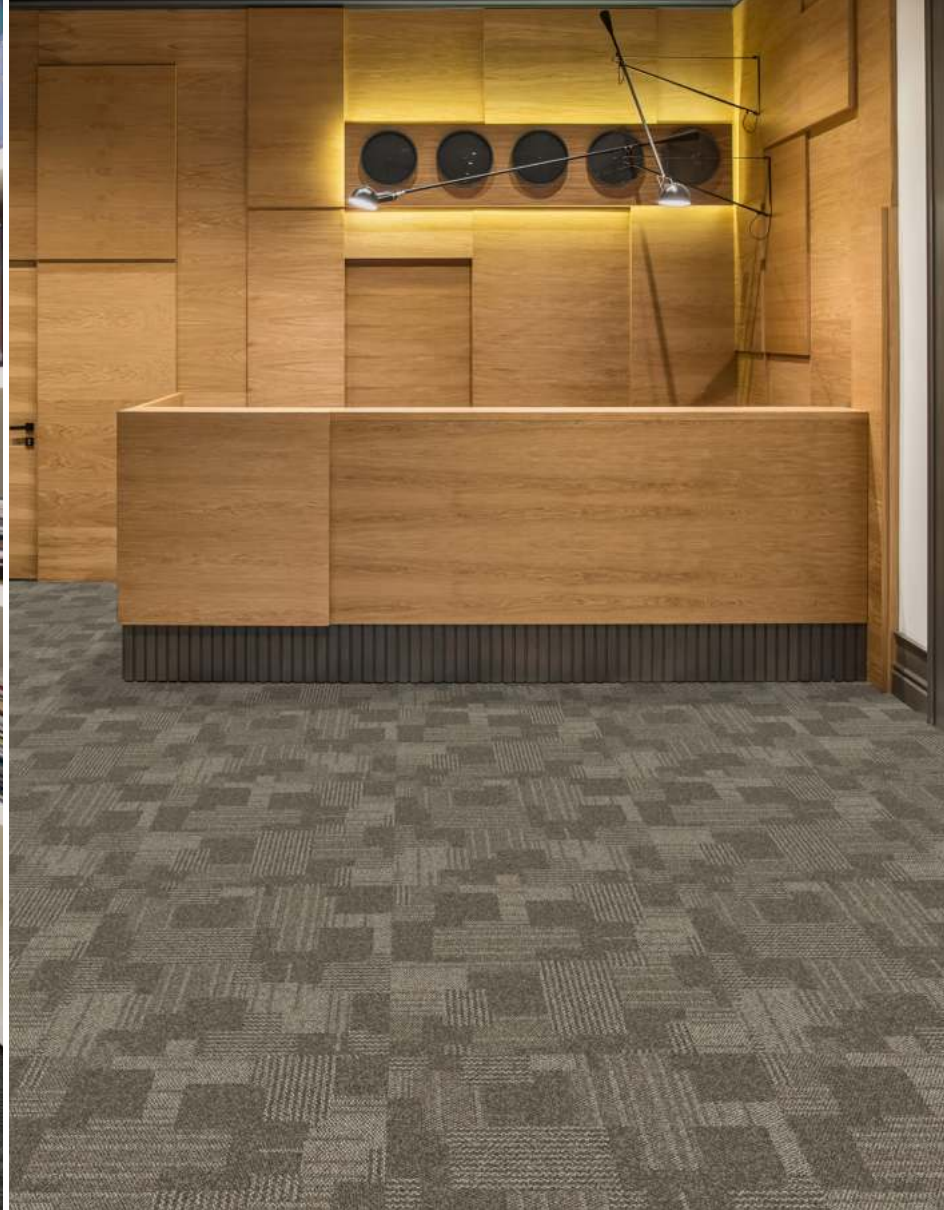


HOW TO INSTALL

QUARTER TURN

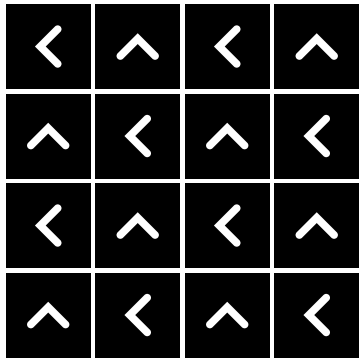

BRICK

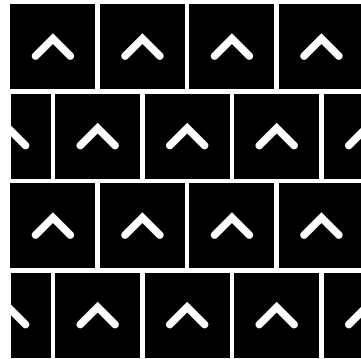



Standard
CARPETS

www.standardcarpets.com