



VULCAN



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750 g/m ²
NUMBER OF TUFTS	260700/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm & 50 cm x 100 cm
PILE HEIGHT	3.0 mm / 6.5 mm
TOTAL PILE HEIGHT	8.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick: Tile Brick, Basket, Half Basket, Herringbone: Plank

SPECIFICATIONS

COLOURLINE



VULCAN - 724



VULCAN - 730



VULCAN - 743



VULCAN - 746



VULCAN - 747



VULCAN - 748



VULCAN - 751



VULCAN - 755



VULCAN - 757



VULCAN - 760




VULCAN - 761




VULCAN - 763



VULCAN - 765



VULCAN - 771




VULCAN - 773




VULCAN - 774



VULCAN - 775



VULCAN - 776



VULCAN - 777



VULCAN - 778




VULCAN - 793




VULCAN - 794



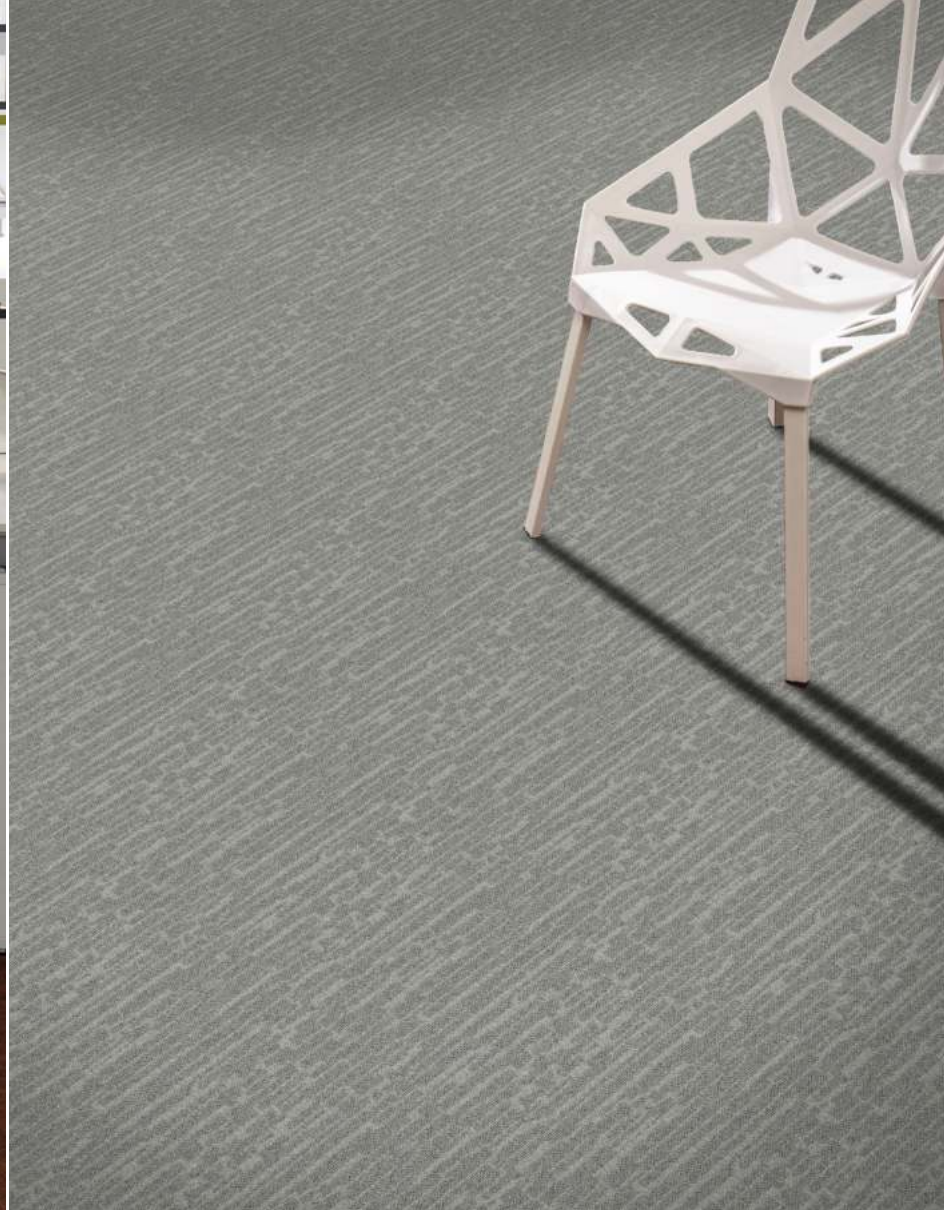


HOW TO INSTALL

QUARTER TURN

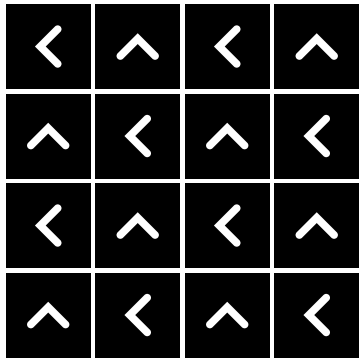

BRICK

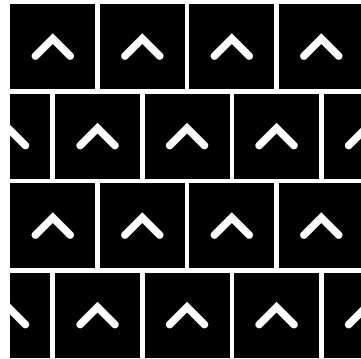



Standard
CARPETS

www.standardcarpets.com