


DXB




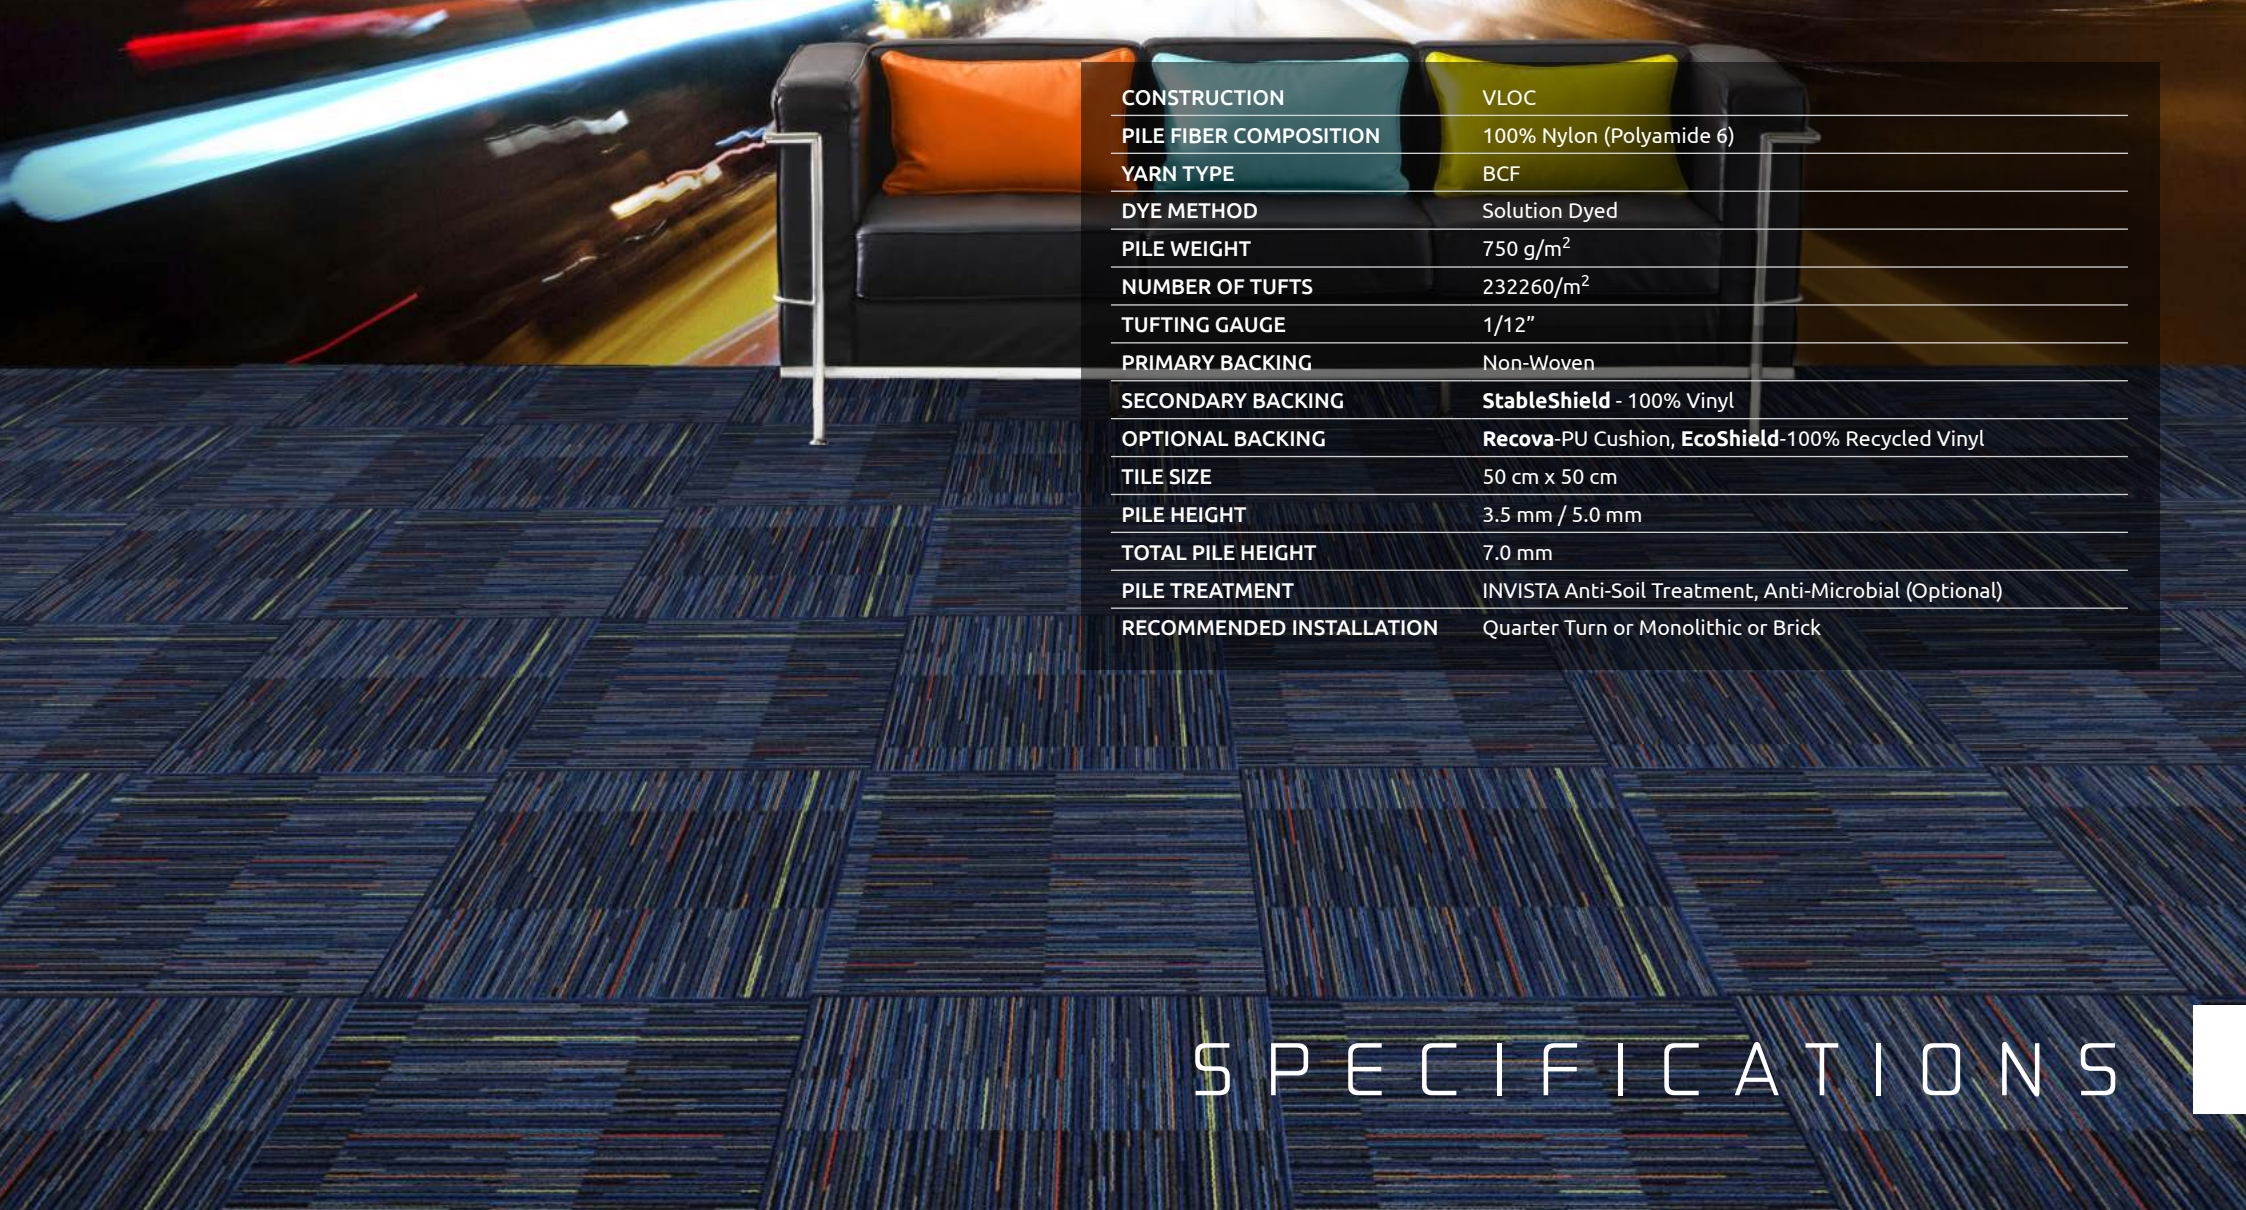

CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750 g/m <sup>2</sup>
NUMBER OF TUFTS	232260/m <sup>2</sup>
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	<b>StableShield</b> - 100% Vinyl
OPTIONAL BACKING	<b>Recova</b> -PU Cushion, <b>EcoShield</b> -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.5 mm / 5.0 mm
TOTAL PILE HEIGHT	7.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic or Brick

# SPECIFICATIONS


# COLOURLINE




DXB - 626




DXB - 648




DXB - 658



DXB - 659




DXB - 664




DXB - 673




DXB - 674



DXB - 675




DXB - 676



DXB - 679




DXB - 695

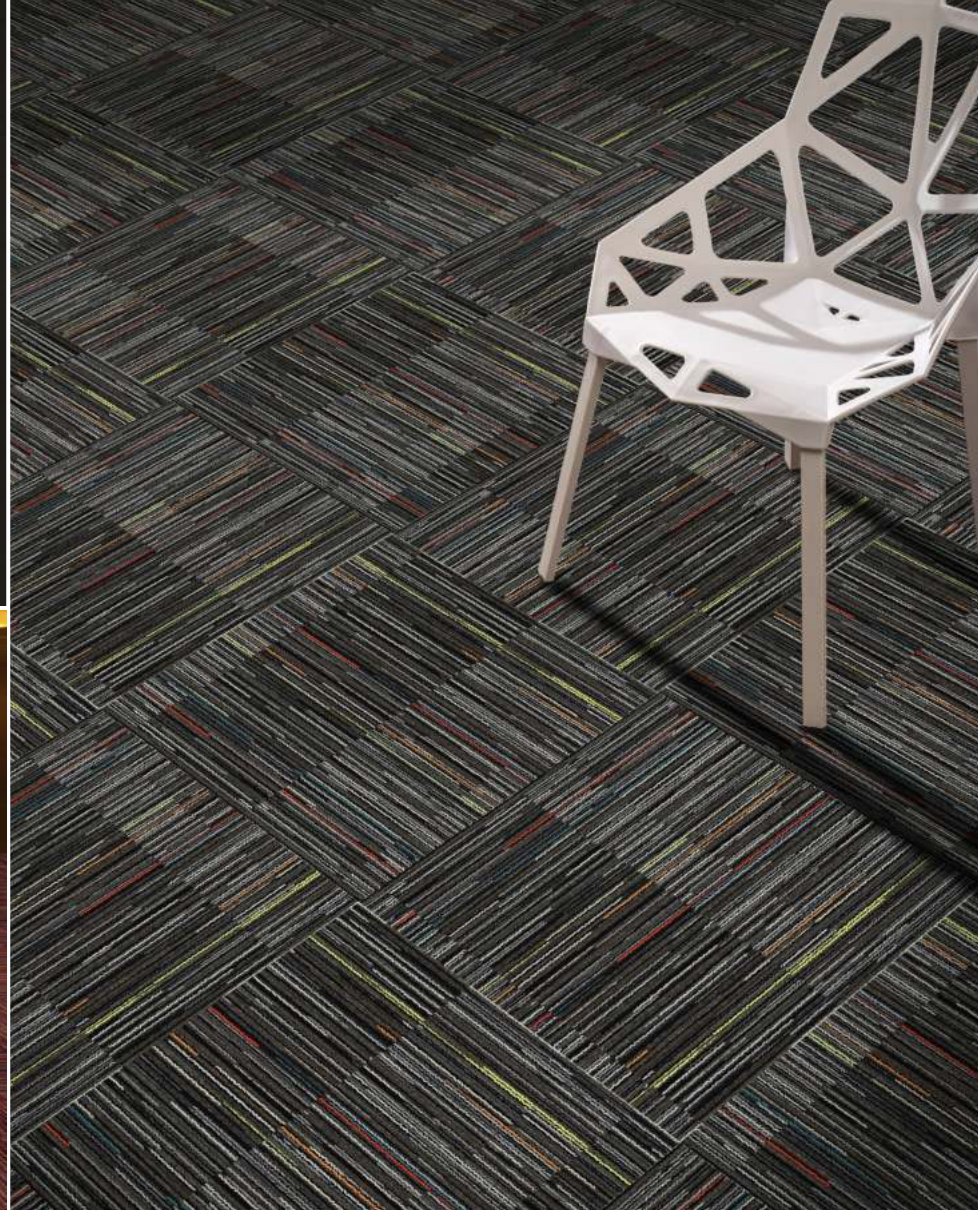




# HOW TO INSTALL


**QUARTER TURN**

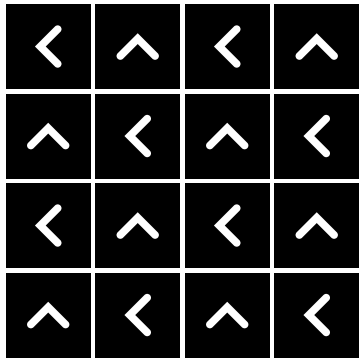

**BRICK**

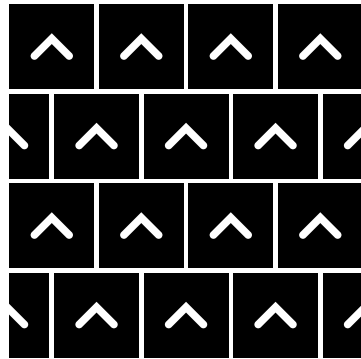

**MONOLITHIC**

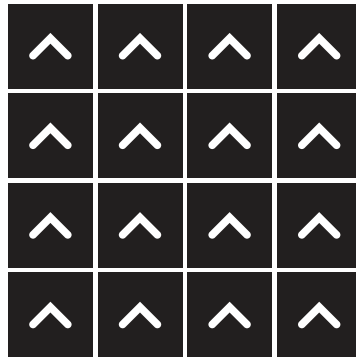



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)