



FAST
WAVE

CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	500 g/m ²
NUMBER OF TUFTS	169850/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5 mm / 5.5 mm
TOTAL PILE HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATION


COLOURLINE



Fast Wave - 672



Fast Wave - 673




Fast Wave - 675



Fast Wave - 676



Fast Wave - 677




Fast Wave - 678



HOW TO INSTALL

QUARTER TURN

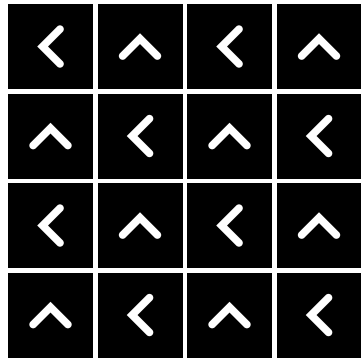



Standard
CARPETS

www.standardcarpets.com