



INDULGE



CONSTRUCTION	VLOC
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750 g/m ²
NUMBER OF TUFTS	260700/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKING	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.5 mm / 5.0 mm
TOTAL PILE HEIGHT	7.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE



INDULGE - 757




INDULGE - 770



INDULGE - 7720




INDULGE - 7724



INDULGE - 773



INDULGE - 7730



INDULGE - 7741



INDULGE - 7743



INDULGE - 7747



INDULGE - 7752



INDULGE - 7753



INDULGE - 7754



INDULGE - 7760




INDULGE - 7761




INDULGE - 7762




INDULGE - 777




INDULGE - 7771




INDULGE - 7775

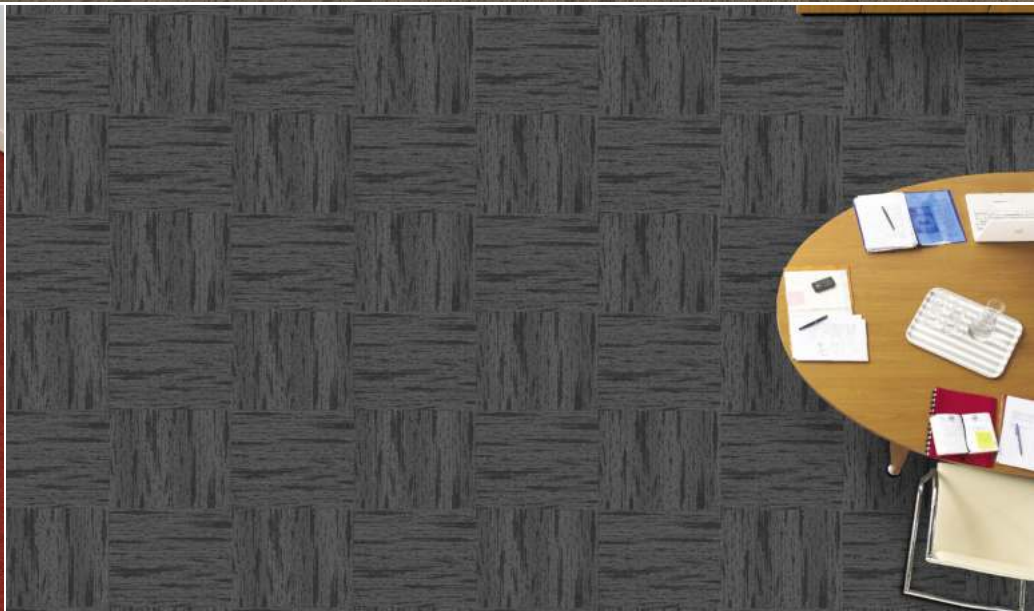

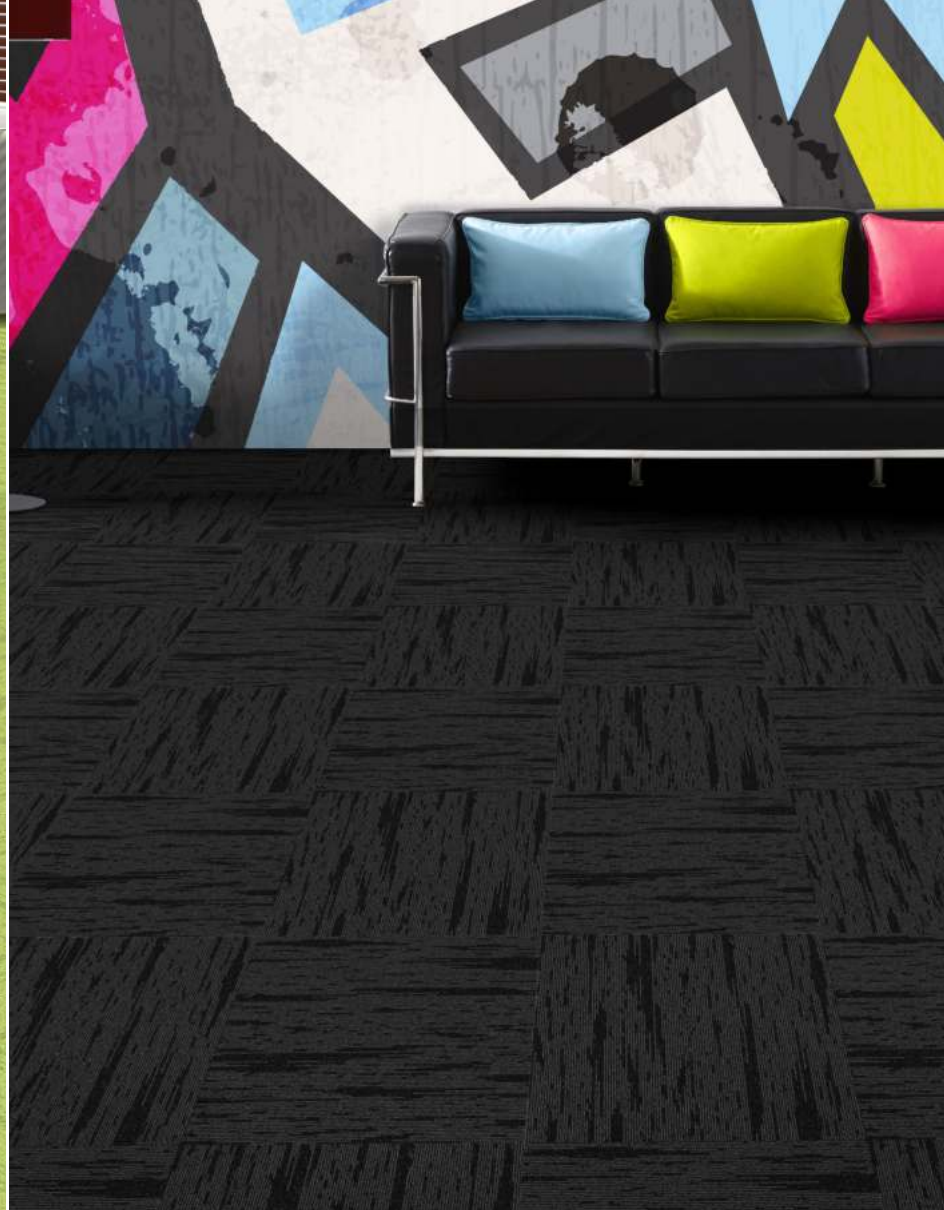


HOW TO INSTALL

QUARTER TURN

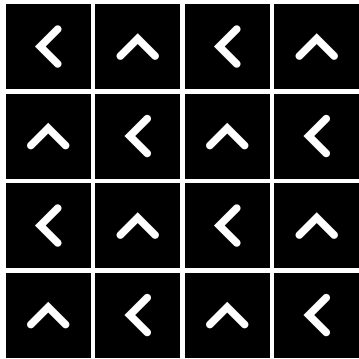

BRICK

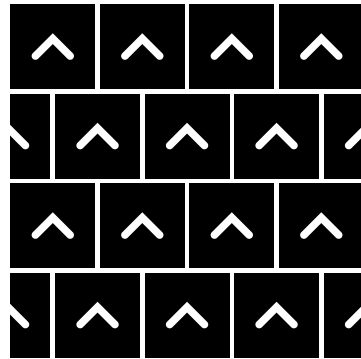



Standard
CARPETS

www.standardcarpets.com