


PLACEBO






CONSTRUCTION	LOOP PILE TIP SHREAD
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	700 g/m ²
NUMBER OF TUFTS	237000/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 5.0 mm
TOTAL PILE HEIGHT	6.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATIONS

COLOURLINE




PLACEBO - 644



PLACEBO - 645



PLACEBO - 646



PLACEBO - 653



PLACEBO - 655



PLACEBO - 656



PLACEBO - 664



PLACEBO - 665




PLACEBO - 670




PLACEBO - 673




PLACEBO - 678




PLACEBO - 695

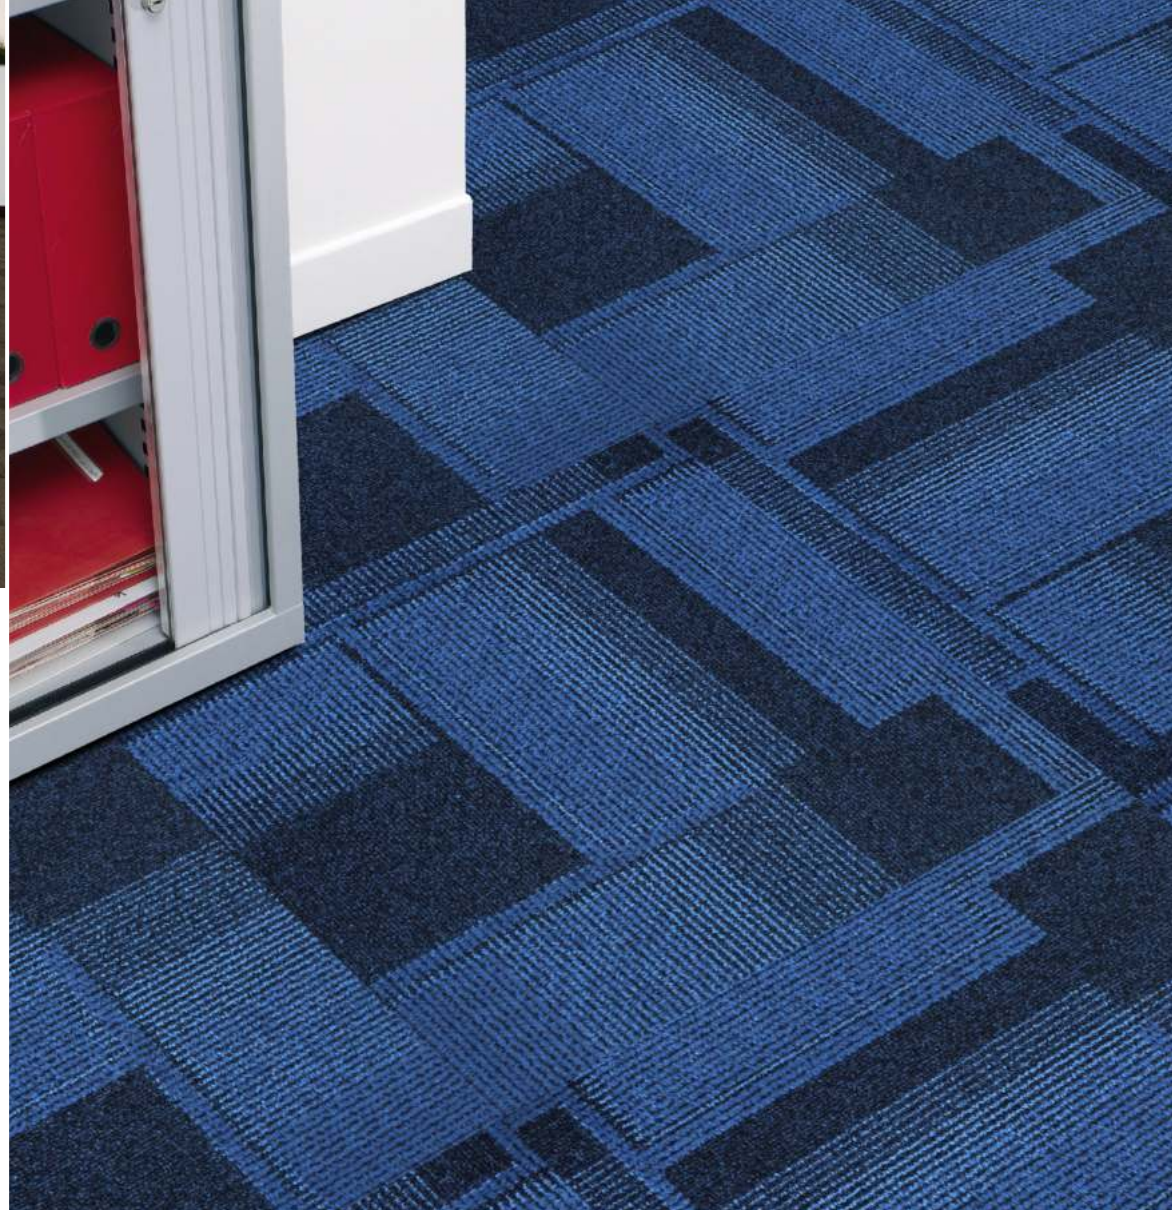

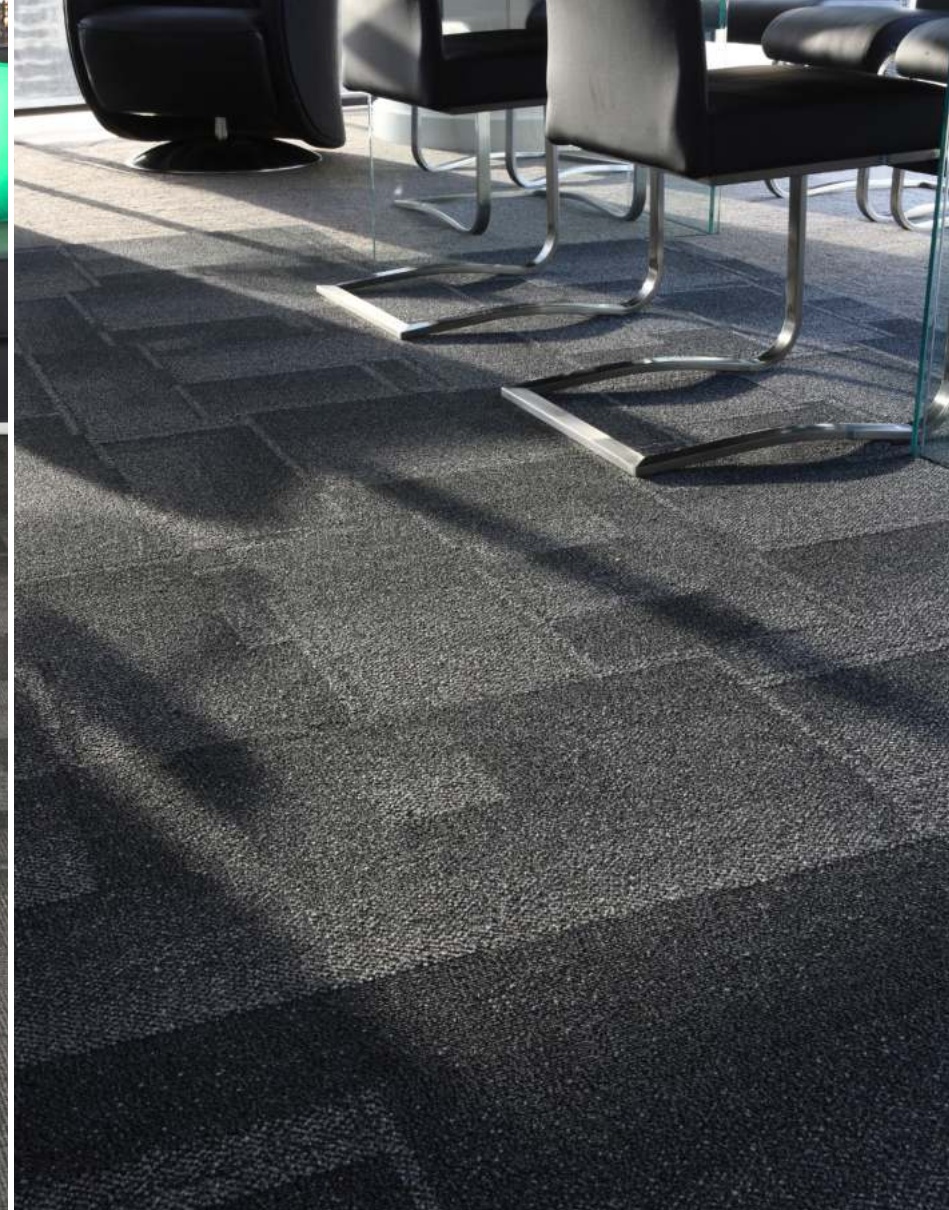

HOW TO INSTALL

QUARTER TURN

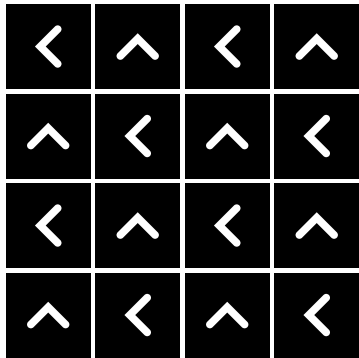



Standard
CARPETS

www.standardcarpets.com