





SEQUEL

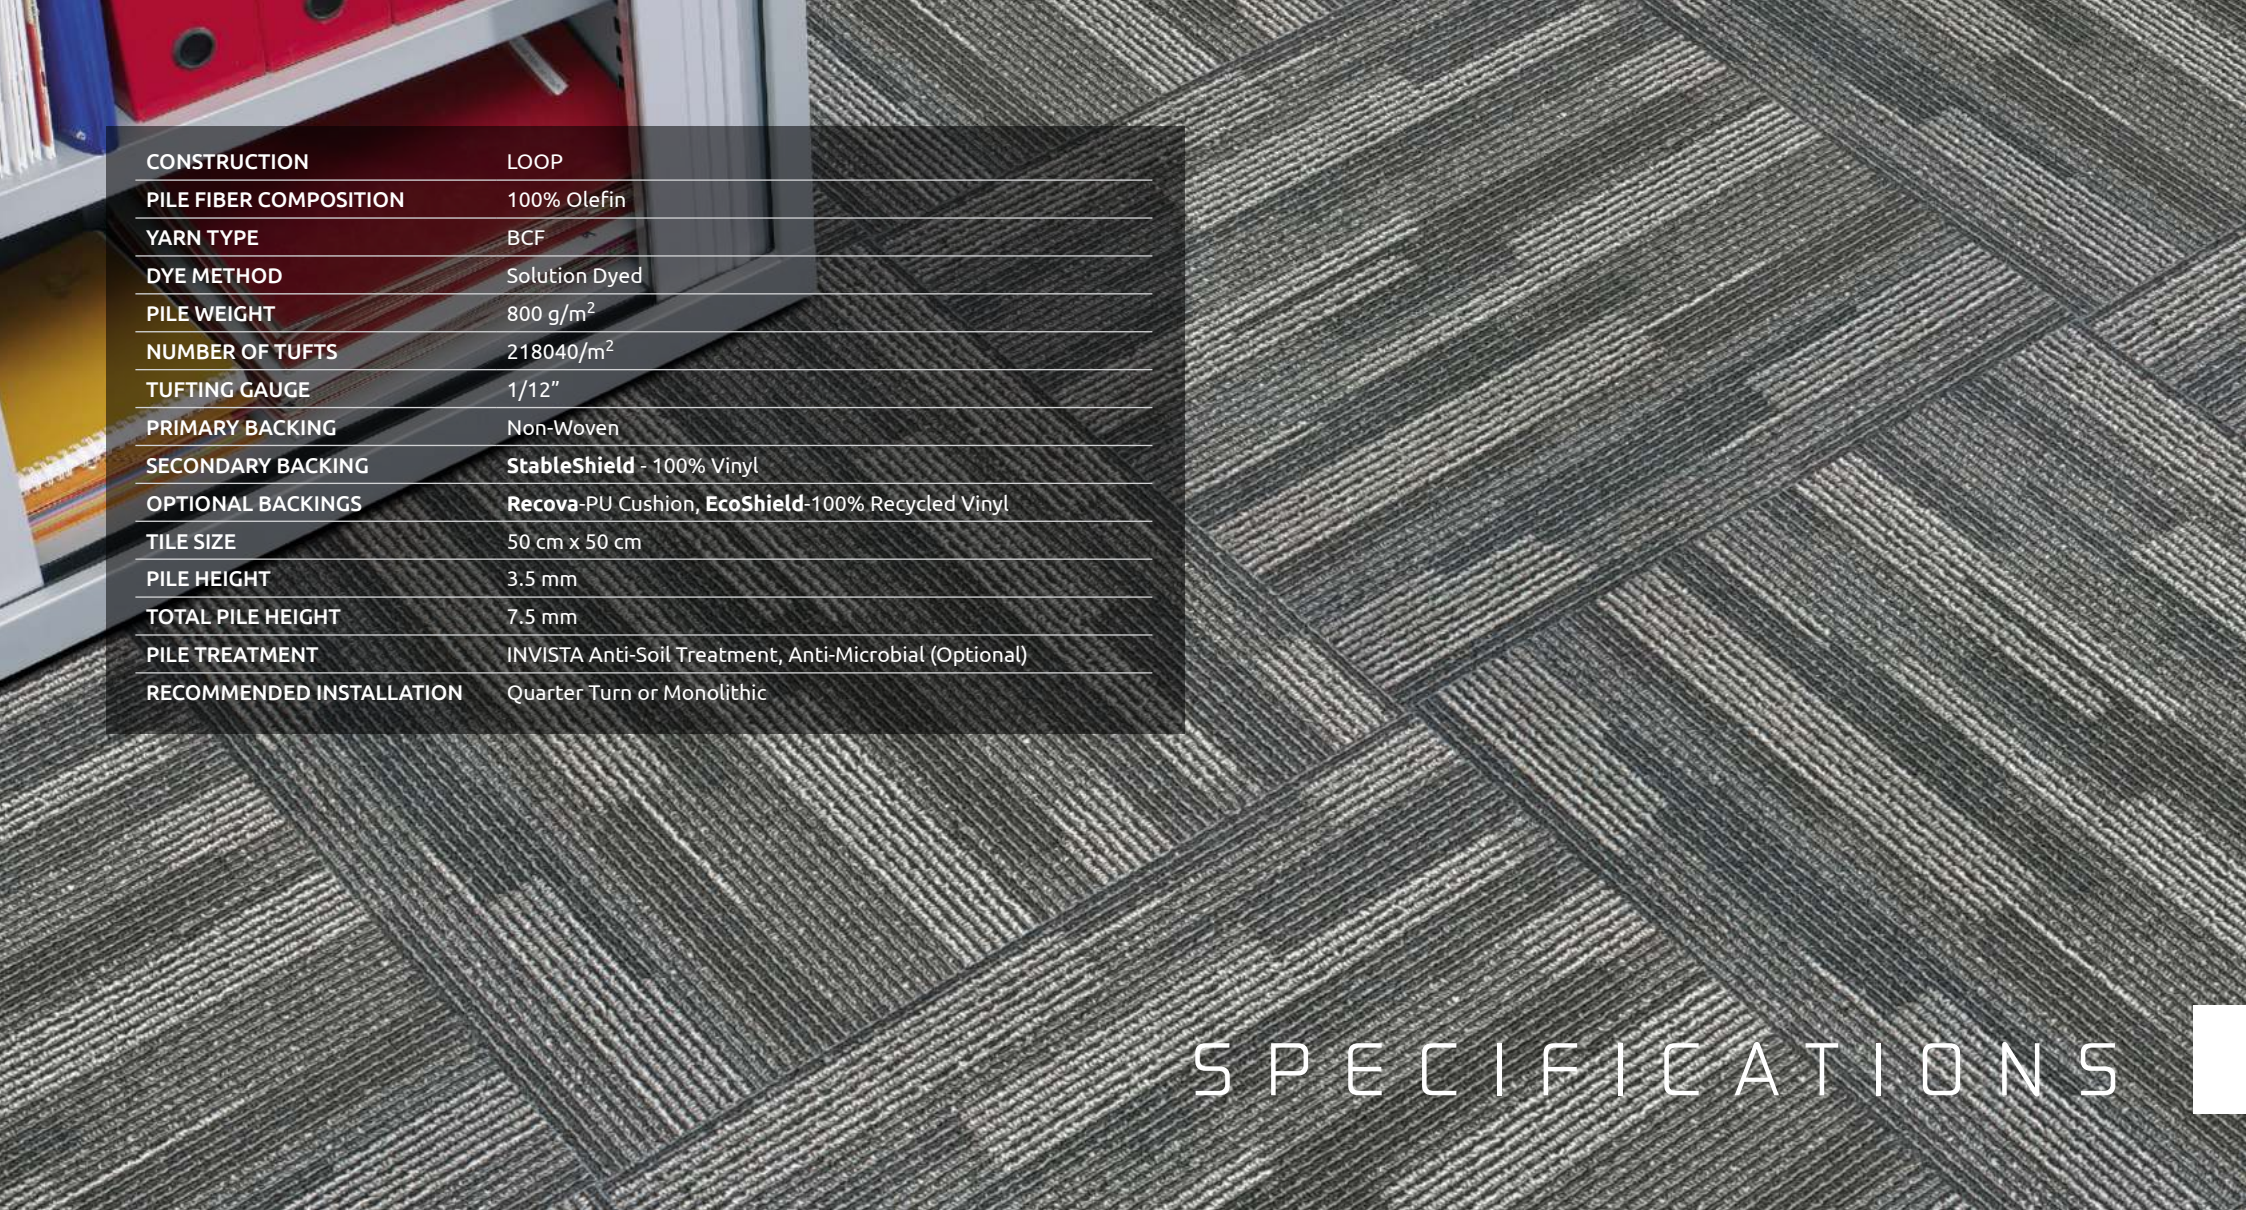


CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	800 g/m ²
NUMBER OF TUFTS	218040/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.5 mm
TOTAL PILE HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS


COLOURLINE




SEQUEL - 844



SEQUEL - 847



SEQUEL - 852




SEQUEL - 858




SEQUEL - 865




SEQUEL - 872



SEQUEL - 873




SEQUEL - 875




SEQUEL - 876



SEQUEL - 877



SEQUEL - 878




SEQUEL - 898






HOW TO INSTALL

QUARTER TURN

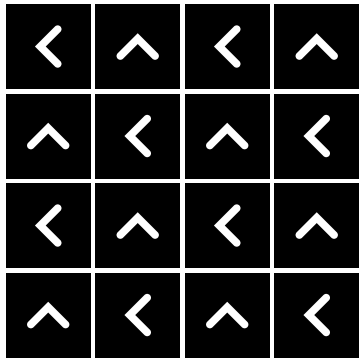

MONOLITHIC

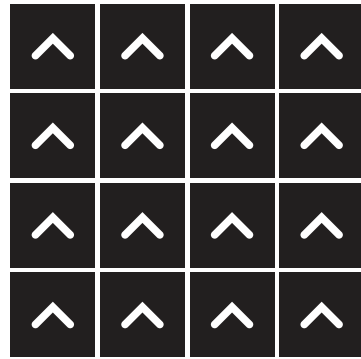



Standard
CARPETS

www.standardcarpets.com