



TEXAS

CONSTRUCTION	LOOP PILE TIP SHREAD
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	750 g/m ²
NUMBER OF TUFTS	251220/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 6.5 mm
TOTAL PILE HEIGHT	8.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick



SPECIFICATIONS


COLOURLINE



TEXAS - 735



TEXAS - 745



TEXAS - 747




TEXAS - 748



TEXAS - 749




TEXAS - 758




TEXAS - 764




TEXAS - 766




TEXAS - 776



TEXAS - 777



TEXAS - 778




TEXAS - 779






HOW TO INSTALL

QUARTER TURN

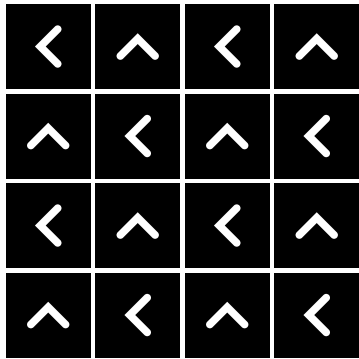

BRICK

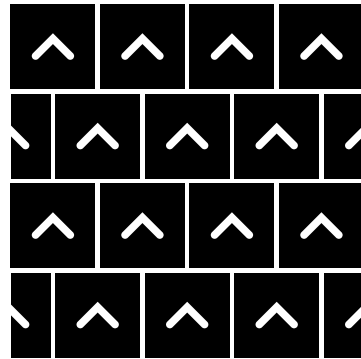



Standard
CARPETS

www.standardcarpets.com