



TURNPIKE



CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	500 g/m ²
NUMBER OF TUFTS	142200/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.5 mm
TOTAL PILE HEIGHT	5.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE




TURNPIKE - 541



TURNPIKE - 542




TURNPIKE - 543



TURNPIKE - 551




TURNPIKE - 566




TURNPIKE - 590



TURNPIKE - 5571



TURNPIKE - 5572



TURNPIKE - 5573




TURNPIKE - 5574






HOW TO INSTALL

QUARTER TURN

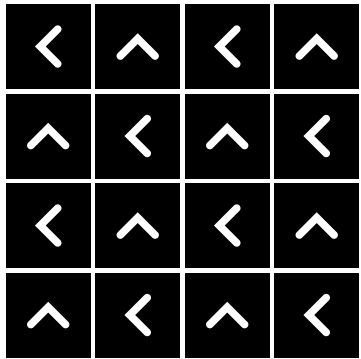

BRICK

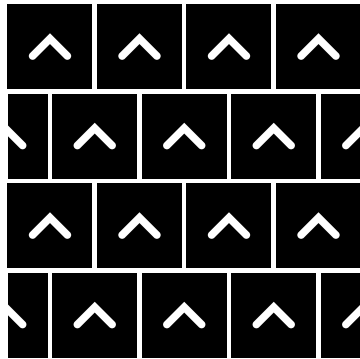



Standard
CARPETS

www.standardcarpets.com