

ABOVE
ONE




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	700g/m ²
NUMBER OF TUFTS	268600/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKINGS	Recova-PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm (19.6 in x 19.6 in)
PILE HEIGHT	2.4 mm / 5.5 mm
TOTAL HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick




SPECIFICATIONS


COLOURLINE




ABOVE ONE - 726




ABOVE ONE - 743




ABOVE ONE - 744




ABOVE ONE - 745




ABOVE ONE - 746




ABOVE ONE - 747




ABOVE ONE - 749




ABOVE ONE - 755




ABOVE ONE - 776



ABOVE ONE - 777



ABOVE ONE - 778




ABOVE ONE - 779




HOW TO INSTALL

QUARTER TURN

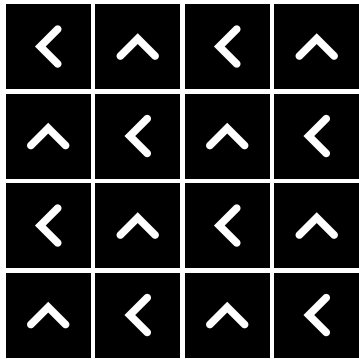

BRICK

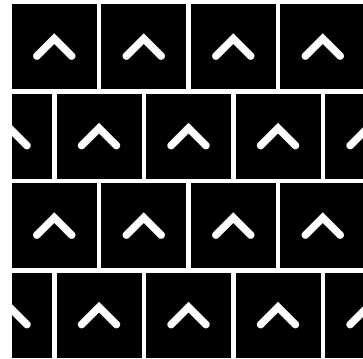



Standard
CARPETS

www.standardcarpets.com