




A M B I E N T




CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	600 g/m <sup>2</sup>
NUMBER OF TUFTS	158000/m <sup>2</sup>
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	<b>StableShield</b> - 100% Vinyl
OPTIONAL BACKINGS	<b>Recova</b> -PU Cushion, <b>EcoShield</b> -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	4.0 mm
TOTAL PILE HEIGHT	6.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

# SPECIFICATIONS

# COLOURLINE




AMBIENT - 524




AMBIENT - 542




AMBIENT - 547



AMBIENT - 549



AMBIENT - 555




AMBIENT - 556




AMBIENT - 557




AMBIENT - 570




AMBIENT - 571



AMBIENT - 575





AMBIENT - 577




AMBIENT - 578



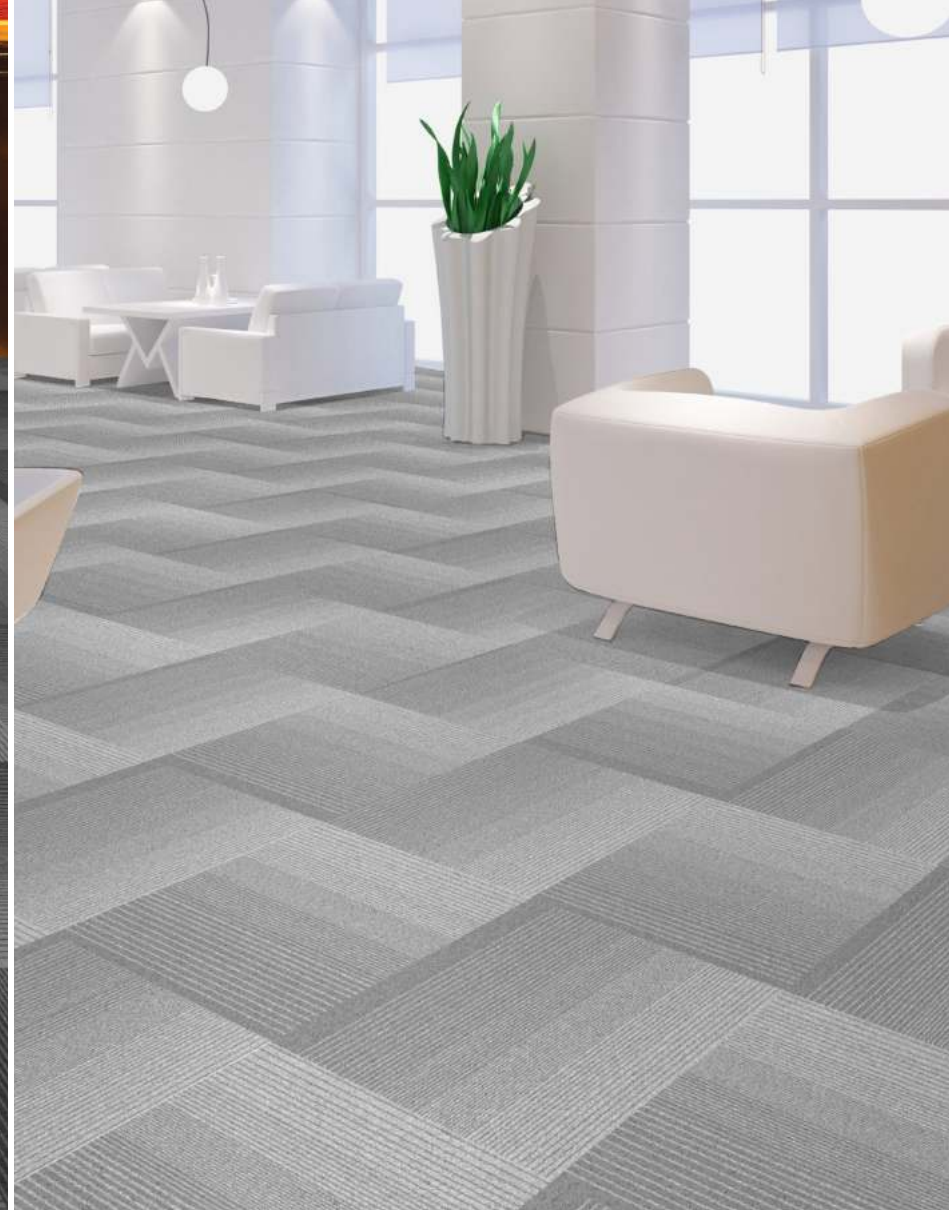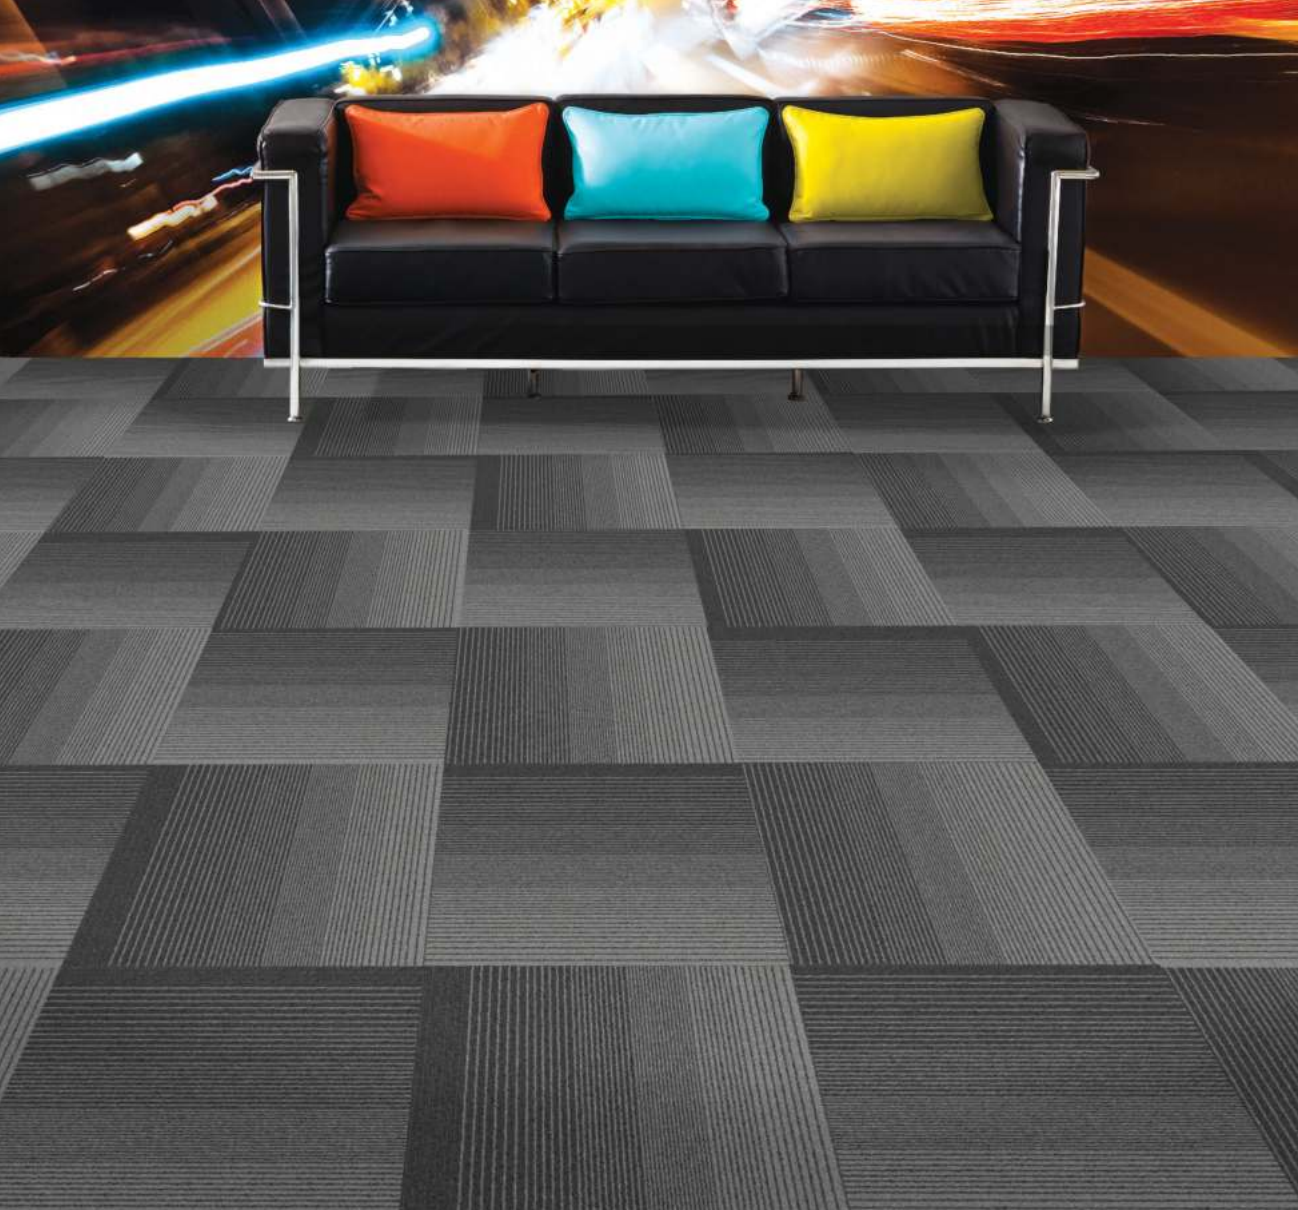


# HOW TO INSTALL

**QUARTER TURN**

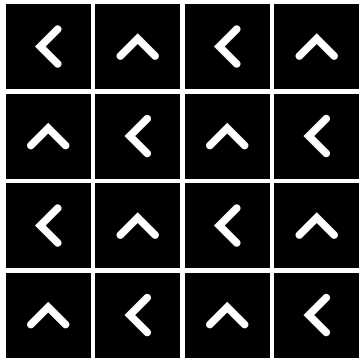

**BRICK**

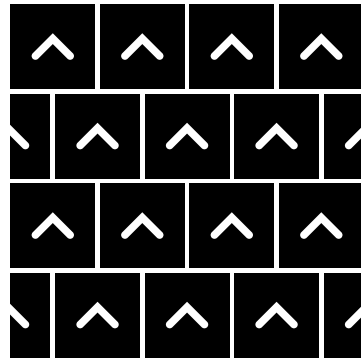



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)