

FAST
FORWARD





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	520 g/m ²
NUMBER OF TUFTS	169850/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	2.5 mm / 5.5 mm
TOTAL PILE HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn

SPECIFICATIONS


COLOURLINE




FAST FORWARD - 658



FAST FORWARD - 674




FAST FORWARD - 675



FAST FORWARD - 677



FAST FORWARD - 678




FAST FORWARD - 679





HOW TO INSTALL

QUARTER TURN

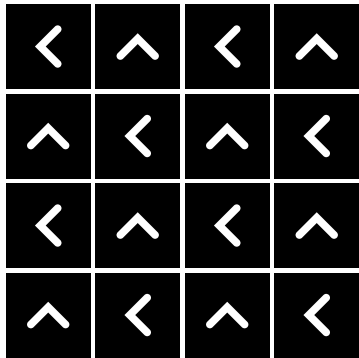



Standard
CARPETS

www.standardcarpets.com