



L I M A



| | |
|--------------------------|--|
| CONSTRUCTION | VLOC |
| PILE FIBER COMPOSITION | 100% Nylon (Polyamide 6) |
| YARN TYPE | BCF |
| DYE METHOD | Solution Dyed |
| PILE WEIGHT | 780 g/m ² |
| NUMBER OF TUFTS | 260700/m ² |
| TUFTING GAUGE | 1/12" |
| PRIMARY BACKING | Non-Woven |
| SECONDARY BACKING | StableShield - 100% Vinyl |
| OPTIONAL BACKING | Recova -PU Cushion, EcoShield -100% Recycled Vinyl |
| TILE SIZE | 50 cm x 50 cm |
| PILE HEIGHT | 2.5 mm / 6.0 mm |
| TOTAL PILE HEIGHT | 8.0 mm |
| PILE TREATMENT | INVISTA Anti-Soil Treatment, Anti-Microbial (Optional) |
| RECOMMENDED INSTALLATION | Quarter Turn or Brick |

SPECIFICATIONS


COLOURLINE




LIMA - CC-746




LIMA - CC-747




LIMA - CC-748




LIMA - CC-776




LIMA - CC-777




LIMA - CC-779




LIMA - CC-794




LIMA - CC-795




LIMA - 746




LIMA - 747




LIMA - 748



LIMA - 776



LIMA - 777




LIMA - 779




LIMA - 794




LIMA - 795

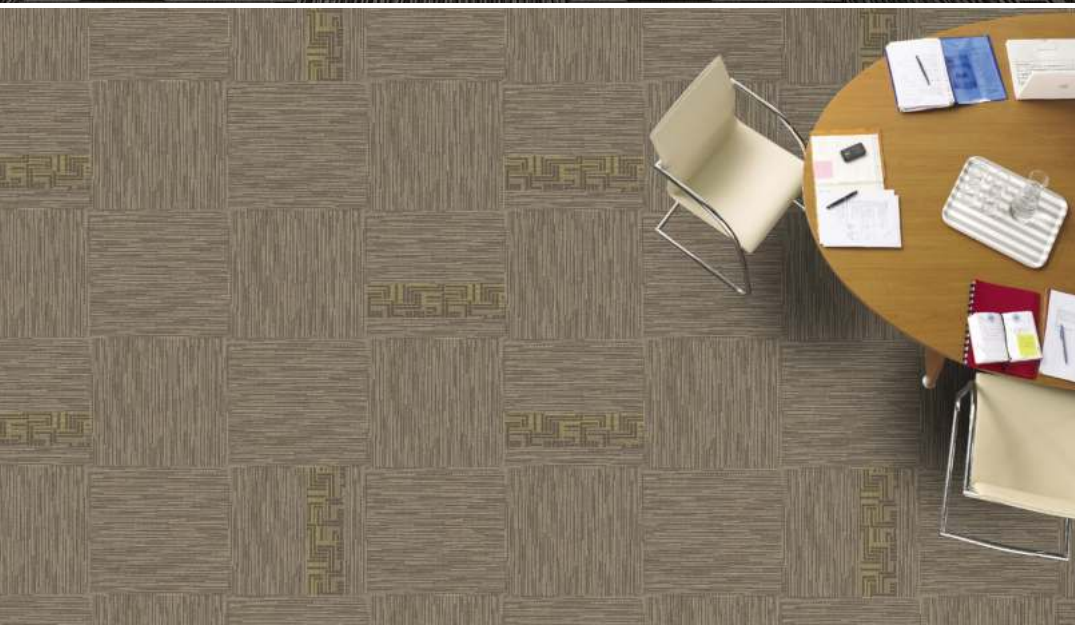

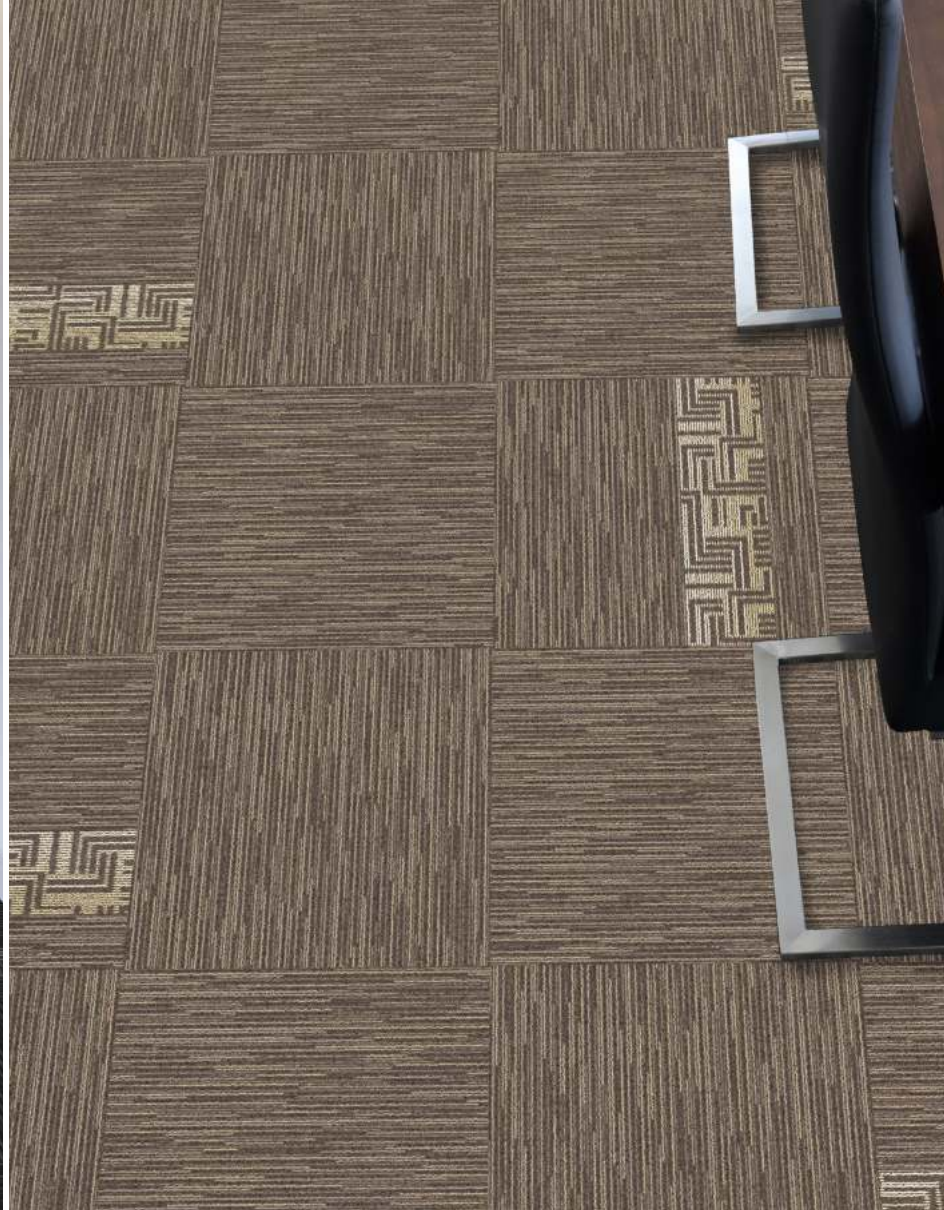


HOW TO INSTALL

QUARTER TURN

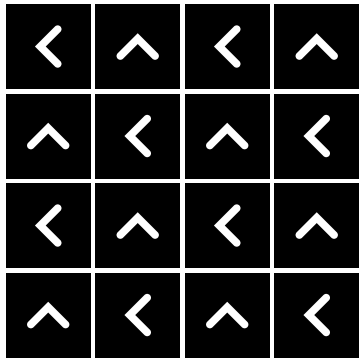

BRICK

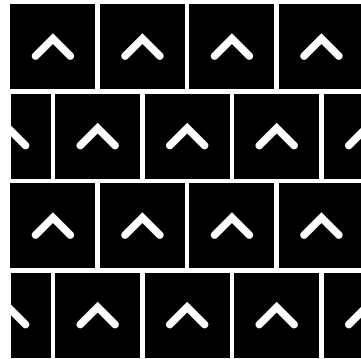



Standard
CARPETS

www.standardcarpets.com