



MONSOON



CONSTRUCTION	LOOP PILE TIP SHREAD
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	600 g/m ²
NUMBER OF TUFTS	180120/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 4.00 mm
TOTAL PILE HEIGHT	7.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS

COLOURLINE



MONSOON-548



MONSOON-549



MONSOON-554



MONSOON-558



MONSOON-58156



MONSOON-58570



MONSOON-559




MONSOON-570




MONSOON-573



MONSOON-574



MONSOON-578




MONSOON-579






HOW TO INSTALL

QUARTER TURN

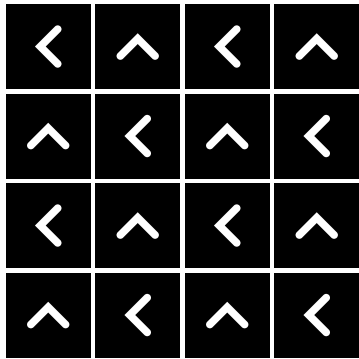

MONOLITHIC

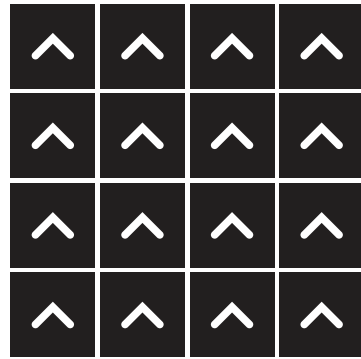



Standard
CARPETS

www.standardcarpets.com