



NEW  
ORLEANS

CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	800 g/m <sup>2</sup>
NUMBER OF TUFTS	222780/m <sup>2</sup>
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	<b>StableShield</b> - 100% Vinyl
OPTIONAL BACKINGS	<b>Recova</b> -PU Cushion, <b>EcoShield</b> -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 6.5 mm
TOTAL PILE HEIGHT	8.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick



SPECIFICATIONS

# COLOURLINE




New Orleans - 774



New Orleans - 746




New Orleans - 748



New Orleans - 756



New Orleans - 757




New Orleans - 775




New Orleans - 776



New Orleans - 777



New Orleans - 778




New Orleans - 779






# HOW TO INSTALL

**QUARTER TURN**

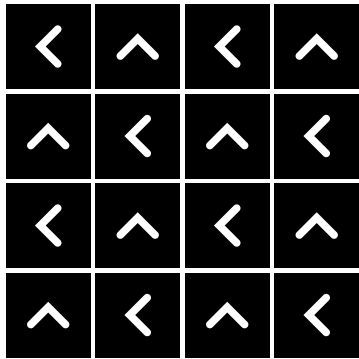

**BRICK**

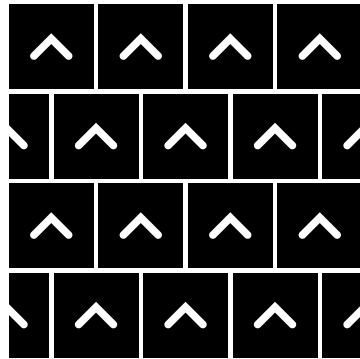



Standard  
*CARPETS*

[www.standardcarpets.com](http://www.standardcarpets.com)