


PARAMOUNT






CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	530 g/m ²
NUMBER OF TUFTS	204800/m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm
TOTAL PILE HEIGHT	6.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


COLOURLINE




PARAMOUNT - 544



PARAMOUNT - 545



PARAMOUNT - 548



PARAMOUNT - 557



PARAMOUNT - 573



PARAMOUNT - 574




PARAMOUNT - 575



PARAMOUNT - 576



PARAMOUNT - 577




PARAMOUNT - 578






HOW TO INSTALL

QUARTER TURN

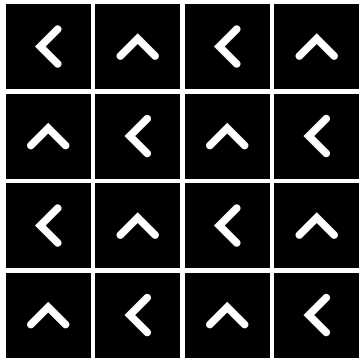

BRICK

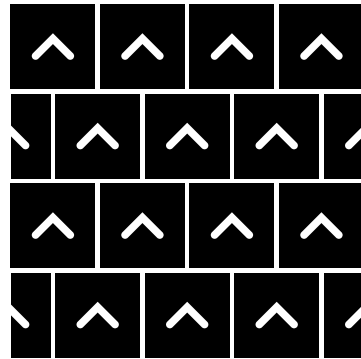



Standard
CARPETS

www.standardcarpets.com