



PREQUEL

CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	680 g/m ²
NUMBER OF TUFTS	222780/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
OPTIONAL BACKINGS	Recova -PU Cushion, EcoShield -100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.5 mm
TOTAL PILE HEIGHT	7.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn or Monolithic

SPECIFICATIONS

COLOURLINE




PREQUEL - 646




PREQUEL - 658



PREQUEL - 670




PREQUEL - 671



PREQUEL - 672



PREQUEL - 673



PREQUEL - 674



PREQUEL - 675



PREQUEL - 678



PREQUEL - 696




PREQUEL - 697






HOW TO INSTALL

QUARTER TURN

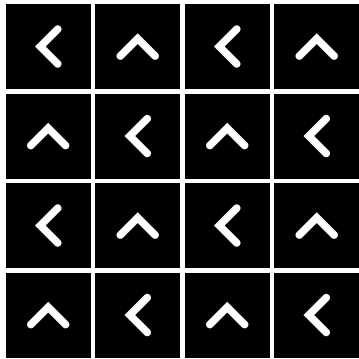

MONOLITHIC

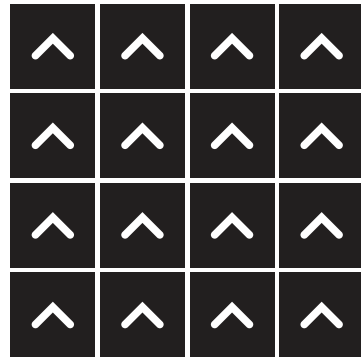



Standard
CARPETS

www.standardcarpets.com